
UPSTAGE ↑

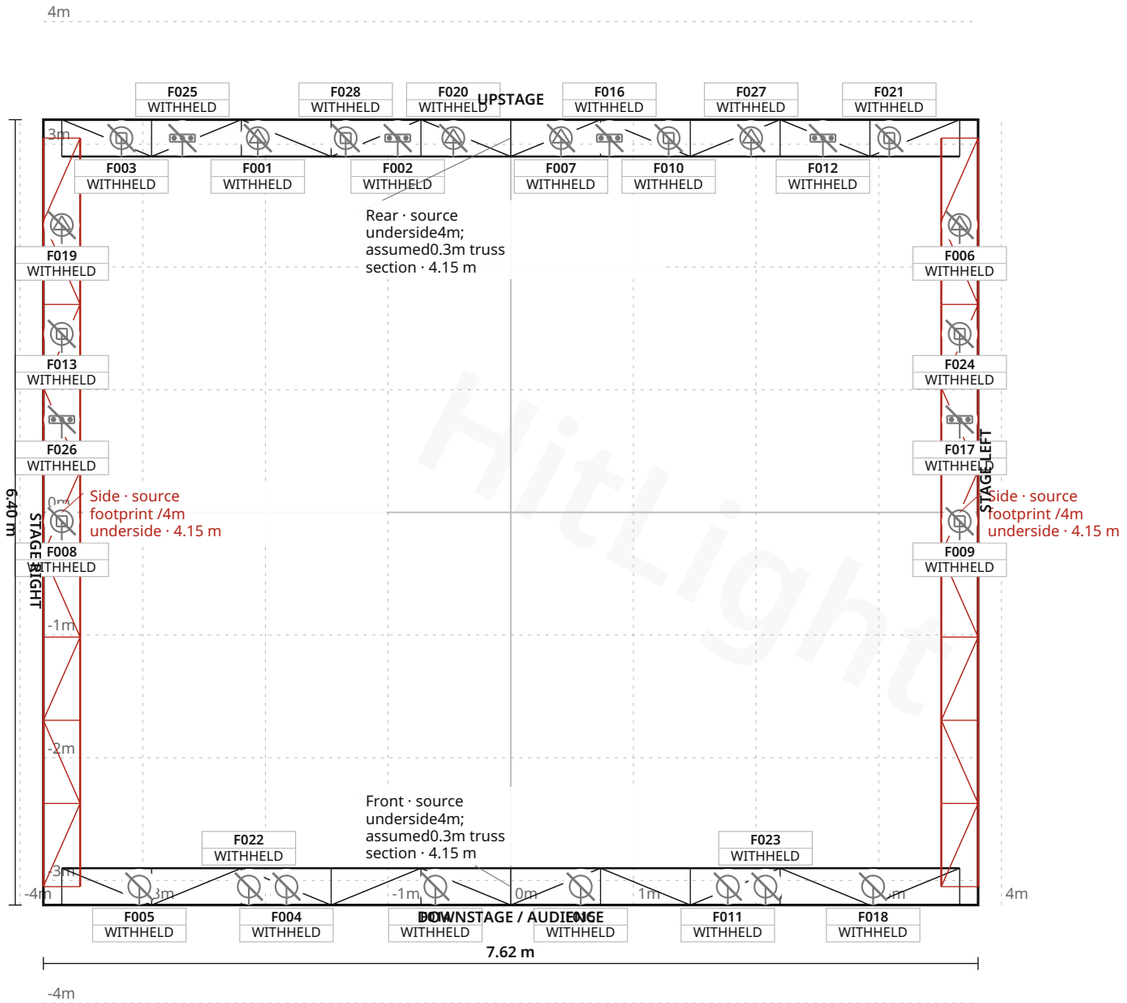

FIXTURE LEGEND

- **Strike 4** — PAR Light · 2×
- **Rogue R1X Spot** — Profile Spot · 6×
- **Chauvet** COLORbandPiXM USB — LED Bar · 4×
- **Chauvet** COLORbandPiXM USB (side) — LED Bar · 2×
- **Chauvet** RogueR1XWash (R1 stock conflict) — Moving Head · 8×
- **PAR64** — PAR Light · 6×

Stage 7.62 m W × 6.40 m D · Grid 1 m

The Wedgewood Rooms · Main room

LIGHT PLOT · PLAN · Main room

HitLight · The Wedgewood Rooms

Portsmouth, United Kingdom

DWG HL · SCALE 1:50 · metric · PRINT AT 100%

Drawn HitLight

Generated from the saved show

SOURCE 9e7eb8a73e32

SYMBOL LEGEND

6 TYPES · 28 FIXTURES · COLOUR BY TYPE



Chauvet Strike 4

PAR Light · Unverified · TBC ch · category symbol

2 physical · 2 plotted

2 disabled · 0 unplaced



Chauvet Professional Rogue R1X Spot

Profile Spot · Unverified · TBC ch · category symbol

6 physical · 6 plotted

6 disabled · 0 unplaced



Unverified source fixture Chauvet COLORbandPiXM USB

LED Bar · Unverified · TBC ch · category symbol

4 physical · 4 plotted

4 disabled · 0 unplaced



Unverified source fixture Chauvet COLORbandPiXM USB (side)

LED Bar · Unverified · TBC ch · category symbol

2 physical · 2 plotted

2 disabled · 0 unplaced



Unverified source fixture Chauvet RogueR1XWash (R1 stock conflict)

Moving Head · Unverified · TBC ch · category symbol

8 physical · 8 plotted

8 disabled · 0 unplaced



Unverified source fixture PAR64

PAR Light · Unverified · TBC ch · category symbol

6 physical · 6 plotted

6 disabled · 0 unplaced

The Wedgewood Rooms · Main room

SYMBOL LEGEND · Main room

HitLight · The Wedgewood Rooms

Portsmouth, United Kingdom

DWG HL · METRIC

Drawn HitLight

Generated from the saved show

SOURCE 9e7eb8a73e32

GENERAL NOTES

1. Source-based lighting plan. Confirm the current rig with the venue.
2. PARTIAL: included fixtures are not a full physical-unit census.
3. DMX PATCH WITHHELD: provisional or unchecked addresses are not published.
4. Partial historical 2021 installation reconstruction;28 included bodies, two additional rear Strike4 and four floor PAR bodies omitted. Hazer/controller excluded from fixture census. Current rig not confirmed.
5. All 28 remain disabled; fixture modes, the source DMX map and control readiness are not verified. See the current legend and fixture schedule for fixture coverage.

HitLight

STAGE ELEMENTS

NAME	TYPE	POSITION	TRIM / SIZE
Front · source underside4m; assumed0.3m truss section	trussStraight	X 0.00 m · Z 3.05 m	4.15 m · 7.32 m W × 0.30 m D
Rear · source underside4m; assumed0.3m truss section	trussStraight	X 0.00 m · Z -3.05 m	4.15 m · 7.32 m W × 0.30 m D
Side · source footprint /4m underside	trussStraight	X -3.66 m · Z 0.00 m	4.15 m · 6.10 m W × 0.30 m D
Side · source footprint /4m underside	trussStraight	X 3.66 m · Z 0.00 m	4.15 m · 6.10 m W × 0.30 m D

HitLight

FIXTURE SCHEDULE

Fixture	Manufacturer / model	Position / mount	Mode / output
VISUAL PLANNING · DMX PATCH WITHHELD			
F001	Chauvet Professional / Rogue R1X Spot	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F002	Unverified source fixture / Chauvet COLORbandPiXM USB	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F003	Unverified source fixture / Chauvet RogueR1XWash (R1 stock conflict)	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F004	Unverified source fixture / PAR64	Front · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F005	Unverified source fixture / PAR64	Front · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F006	Chauvet Professional / Rogue R1X Spot	Side · source footprint /4m underside	Unverified · Output excluded
F007	Chauvet Professional / Rogue R1X Spot	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F008	Unverified source fixture / Chauvet RogueR1XWash (R1 stock conflict)	Side · source footprint /4m underside	Unverified · Output excluded
F009	Unverified source fixture / Chauvet RogueR1XWash (R1 stock conflict)	Side · source footprint /4m underside	Unverified · Output excluded
F010	Unverified source fixture / Chauvet RogueR1XWash (R1 stock conflict)	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F011	Unverified source fixture / PAR64	Front · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F012	Unverified source fixture / Chauvet COLORbandPiXM USB	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F013	Unverified source fixture / Chauvet RogueR1XWash (R1 stock conflict)	Side · source footprint /4m underside	Unverified · Output excluded
F014	Unverified source fixture / PAR64	Front · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F015	Unverified source fixture / PAR64	Front · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F016	Unverified source fixture / Chauvet COLORbandPiXM USB	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F017	Unverified source fixture / Chauvet COLORbandPiXM USB (side)	Side · source footprint /4m underside	Unverified · Output excluded
F018	Unverified source fixture / PAR64	Front · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F019	Chauvet Professional / Rogue R1X Spot	Side · source footprint /4m underside	Unverified · Output excluded
F020	Chauvet Professional / Rogue R1X Spot	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded

Planning reference only. Confirm installed modes and patch with the venue.

The Wedgewood Rooms · Main room

FIXTURE SCHEDULE · Main room

HitLight · The Wedgewood Rooms

Portsmouth, United Kingdom

DWG HL · METRIC

Drawn HitLight

Generated from the saved show

SOURCE 9e7eb8a73e32

FIXTURE SCHEDULE · CONTINUED

Fixture	Manufacturer / model	Position / mount	Mode / output
VISUAL PLANNING · DMX PATCH WITHHELD			
F021	Unverified source fixture / Chauvet RogueR1XWash (R1 stock conflict)	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F022	Chauvet / Strike 4	Front · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F023	Chauvet / Strike 4	Front · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F024	Unverified source fixture / Chauvet RogueR1XWash (R1 stock conflict)	Side · source footprint /4m underside	Unverified · Output excluded
F025	Unverified source fixture / Chauvet COLORbandPiXM USB	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F026	Unverified source fixture / Chauvet COLORbandPiXM USB (side)	Side · source footprint /4m underside	Unverified · Output excluded
F027	Chauvet Professional / Rogue R1X Spot	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded
F028	Unverified source fixture / Chauvet RogueR1XWash (R1 stock conflict)	Rear · source underside4m; assumed0.3m truss section	Unverified · Output excluded

Planning reference only. Confirm installed modes and patch with the venue.

HitLight

VALIDATION APPENDIX

WARNING · PATCH_WITHHELD

DMX patch facts are withheld pending source verification. This planning document cannot be used for hardware output.

Objects: — · Remediation: review the source facts and regenerate.

ERROR · STAGE_DIMENSIONS_UNCONFIRMED

Confirm the stage dimensions before producing a final technical document.

Objects: Main room · Remediation: review the source facts and regenerate.

ERROR · DUPLICATE_ELEMENT_LABEL

Stage-element labels must be unique.

Objects: Side · source footprint /4m underside · Remediation: review the source facts and regenerate.

WARNING · MODE_UNVERIFIED

DMX modes are unverified; output remains excluded.

Objects: F001–F028 · Remediation: review the source facts and regenerate.

WARNING · FIXTURE_DISABLED

Fixtures are disabled for this visual planning reconstruction.

Objects: F001–F028 · Remediation: review the source facts and regenerate.

WARNING · TITLE_METADATA_INCOMPLETE

Some professional title-block metadata is missing; the document will show an em dash.

Objects: 44bc2fbac75cb69d8b490840 · Remediation: review the source facts and regenerate.

HitLight

VENUE & DRAWING SOURCES

The Wedgewood Rooms

Main room · House rig

Portsmouth, GB

http://www.wedgewood-rooms.co.uk/

Sources checked 2026-10-19

Generated by HitLight from the saved published venue rig. Source attribution and reconstruction limitations are retained below.

Symbols: HitLight-owned category artwork. No manufacturer model geometry or original source pages included.

Partial historical 2021 installation reconstruction;28 included bodies, two additional rear Strike4 and four floor PAR bodies omitted. Hazer/controller excluded from fixture census. Current rig not confirmed.

All 28 remain disabled; fixture modes, the source DMX map and control readiness are not verified. See the current legend and fixture schedule for fixture coverage.

Source quad-view gives25ft×21ft truss footprint and 4m underside height. Member centre 4.15m assumes 0.3m box-truss section; plausible centre 4.05–4.25m. Confirm current truss section/trim with venue.

Source glyph order and unequal relative spacing were digitized onto the documented truss footprint. Along-member positions and clamp offsets are approximate; footprint is not a surveyed performance deck.

Generic category bodies approximate dimensions, mounting and focus; side strips use schematic bar proxies. Actual stock versions differ across older sources.

Source PDFs and manufacturer meshes remain private. Public scene uses HitLight category geometry; mounting, safe loads and aiming require house confirmation.

Catalogue identities corrected in place; installed modes, patch, geometry and source currency remain unverified.

Partial source-based planning reconstruction; the current installation and complete fixture census are unverified.

Source-matched catalogue bodies are shown where available. Unresolved source identities remain labelled visual markers. Installed modes and DMX patch require verification; visual-only fixtures remain excluded from output.

HitLight

VENUE & DRAWING SOURCES

Partial historical 2021 installation reconstruction;28 included bodies, two additional rear Strike4 and four floor PAR bodies omitted. Hazer/controller excluded from fixture census. Current rig not confirmed.

All 28 remain disabled; fixture modes, the source DMX map and control readiness are not verified. See the current legend and fixture schedule for fixture coverage.

Source quad-view gives25ft×21ft truss footprint and 4m underside height. Member centre 4.15m assumes 0.3m box-truss section; plausible centre 4.05–4.25m. Confirm current truss section/trim with venue.

Source glyph order and unequal relative spacing were digitized onto the documented truss footprint. Along-member positions and clamp offsets are approximate; footprint is not a surveyed performance deck.

Generic category bodies approximate dimensions, mounting and focus; side strips use schematic bar proxies. Actual stock versions differ across older sources.

Source PDFs and manufacturer meshes remain private. Public scene uses HitLight category geometry; mounting, safe loads and aiming require house confirmation.

Generated from the saved published HitLight layout; fixture positions and room geometry are unchanged. Not an official venue drawing.

Output remains excluded for visual-only fixtures. Catalogue identity does not verify installed modes, addresses or the current installation.

Catalogue identities corrected in place; installed modes, patch, geometry and source currency remain unverified.

Partial source-based planning reconstruction; the current installation and complete fixture census are unverified.

Source-matched catalogue bodies are shown where available. Unresolved source identities remain labelled visual markers. Installed modes and DMX patch require verification; visual-only fixtures remain excluded from output.

Official venue technical specifications: https://www.wedgewood-rooms.co.uk/tech-specs · checked 2026-10-19

Public venue page: https://www.hitlight.app/venues/united-kingdom/the-wedgewood-rooms-44bc2fba

HitLight