
ACME

ACME ACMANIMA W (PANEL 36 WW)

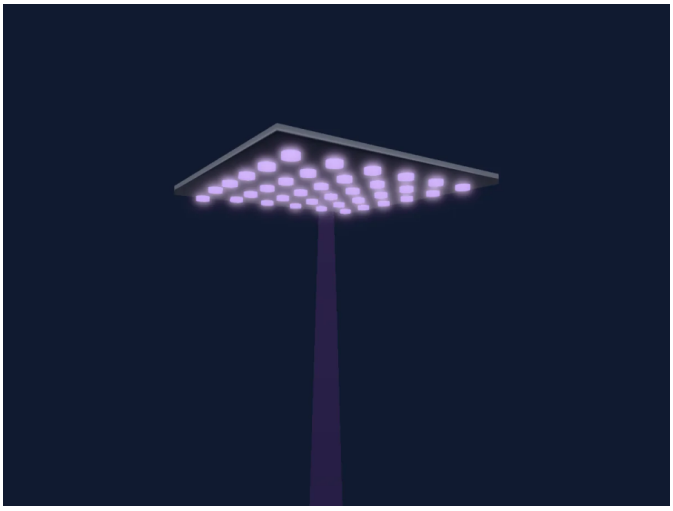

Manufacturer	**ACME**
Type	**PAR**
DMX modes	**3**
DMX footprint	**36, 40, 42 channels**
Beam angle	**4°**
Size (W × H × D)	**500 × 20 × 500 mm**
GDTF fixture type	**58E79256-0BB4-4F4B-9BA9-80…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

Mode 3 36 DMX	36 ch
Mode 2 40 DMX	40 ch
Mode 1 42 DMX	42 ch

Mode 3 36 DMX

36 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer	0	
4	Dimmer	0	
5	Dimmer	0	
6	Dimmer	0	
7	Dimmer	0	
8	Dimmer	0	
9	Dimmer	0	
10	Dimmer	0	
11	Dimmer	0	
12	Dimmer	0	
13	Dimmer	0	
14	Dimmer	0	
15	Dimmer	0	
16	Dimmer	0	
17	Dimmer	0	
18	Dimmer	0	
19	Dimmer	0	
20	Dimmer	0	
21	Dimmer	0	
22	Dimmer	0	
23	Dimmer	0	
24	Dimmer	0	
25	Dimmer	0	
26	Dimmer	0	
27	Dimmer	0	
28	Dimmer	0	
29	Dimmer	0	
30	Dimmer	0	
31	Dimmer	0	
32	Dimmer	0	
33	Dimmer	0	
34	Dimmer	0	
35	Dimmer	0	
36	Dimmer	0	

Mode 2 40 DMX

40 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer	0	
4	Dimmer	0	
5	Dimmer	0	

Mode 2 40 DMX (continued)

Ch	Function	Default	DMX values
6	Dimmer	0	
7	Dimmer	0	
8	Dimmer	0	
9	Dimmer	0	
10	Dimmer	0	
11	Dimmer	0	
12	Dimmer	0	
13	Dimmer	0	
14	Dimmer	0	
15	Dimmer	0	
16	Dimmer	0	
17	Dimmer	0	
18	Dimmer	0	
19	Dimmer	0	
20	Dimmer	0	
21	Dimmer	0	
22	Dimmer	0	
23	Dimmer	0	
24	Dimmer	0	
25	Dimmer	0	
26	Dimmer	0	
27	Dimmer	0	
28	Dimmer	0	
29	Dimmer	0	
30	Dimmer	0	
31	Dimmer	0	
32	Dimmer	0	
33	Dimmer	0	
34	Dimmer	0	
35	Dimmer	0	
36	Dimmer	0	
37	Effect Macro	0	
38	Shutter / Strobe	15	0–7 Closed 8–15 Open 16–130 min Strobe 131–131 max Strobe 132–139 Open 2 140–180 Min Pulse Close 181–181 Max Pulse Close 182–189 Open 3 190–230 Min Pulse Open 231–231 Max Pulse Open 232–239 Open 4 240–247 Strobe Ran 248–255 Open 5
39	Dimmer	0	
40	Dimmer Fine	0	Fine byte of Dimmer

Mode 1 42 DMX

42 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer	0	
4	Dimmer	0	
5	Dimmer	0	
6	Dimmer	0	
7	Dimmer	0	
8	Dimmer	0	
9	Dimmer	0	
10	Dimmer	0	
11	Dimmer	0	
12	Dimmer	0	
13	Dimmer	0	
14	Dimmer	0	
15	Dimmer	0	
16	Dimmer	0	
17	Dimmer	0	
18	Dimmer	0	
19	Dimmer	0	
20	Dimmer	0	
21	Dimmer	0	
22	Dimmer	0	
23	Dimmer	0	
24	Dimmer	0	
25	Dimmer	0	
26	Dimmer	0	
27	Dimmer	0	
28	Dimmer	0	
29	Dimmer	0	
30	Dimmer	0	
31	Dimmer	0	
32	Dimmer	0	
33	Dimmer	0	
34	Dimmer	0	
35	Dimmer	0	
36	Dimmer	0	
37	Effect Macro Mode	0	0–14 Blackout 15–47 Full On 48–95 Line Effect 96–135 Number 1 to 9 136–175 Letter A to Z 176–215 Letter a to z 216–255 Blackout 1
38	Effect Macro	0	

Mode 1 42 DMX (continued)

Ch	Function	Default	DMX values
39	Shutter / Strobe	15	0–7 Closed 8–15 Open 16–130 min Strobe 131–131 max Strobe 132–139 Open 2 140–180 Min Pulse Close 181–181 Max Pulse Close 182–189 Open 3 190–230 Min Pulse Open 231–231 Max Pulse Open 232–239 Open 4 240–247 Strobe Ran 248–255 Open 5
40	Dimmer	0	
41	Dimmer Fine	0	Fine byte of Dimmer
42	Function	0	0–29 Null 30–39 Dimmer Curve Linear 40–49 Dimmer Curve Square Law 50–59 Dimmer Curve Inv SQ Law 60–69 Dimmer Curve S 70–179 Null 2 180–189 Fast 190–199 Smooth 200–255 Null