
ADJ

Starburst

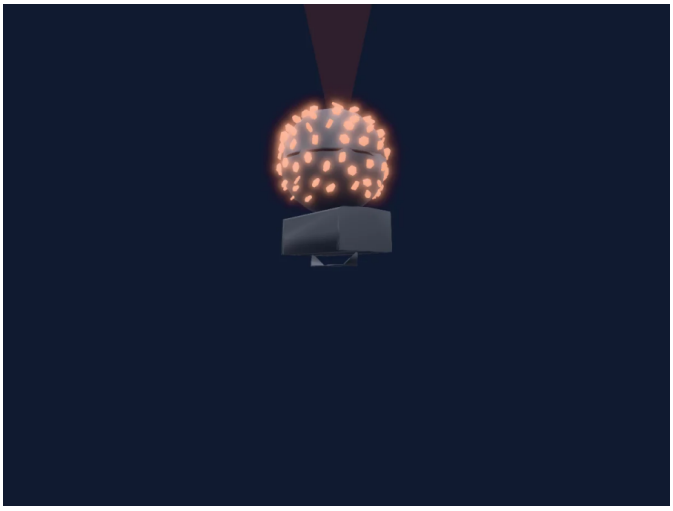

Manufacturer	**ADJ**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**12 channels**
Beam angle	**25°**
Size (W × H × D)	**236 × 131 × 134 mm**
GDTF fixture type	**078B0F47-8784-4CFA-A3DB-B0…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Fixture reset · Strobe

DMX modes

12 ch 12 ch

12 ch

12 channels

Ch	Function	Default	DMX values
1	Red	0	0–62 0 % 63–126 25 % 127–190 50 % 191–254 75 % 255–255 100 %
2	Green	0	0–62 0 % 63–126 25 % 127–190 50 % 191–254 75 % 255–255 100 %
3	Blue	0	0–62 0 % 63–126 25 % 127–190 50 % 191–254 75 % 255–255 100 %
4	White	0	0–62 0 % 63–126 25 % 127–190 50 % 191–254 75 % 255–255 100 %
5	Color Add RY	0	0–62 0 % 63–126 25 % 127–190 50 % 191–254 75 % 255–255 100 %
6	Color Add BM	0	0–62 0 % 63–126 25 % 127–190 50 % 191–254 75 % 255–255 100 %
7	Shutter / Strobe	252	0–7 LED OFF 8–15 LED On 16–131 Strobe Effect Slow to Fast 132–139 LED ON 140–181 pulse Slow to fast 182–189 LED ON 190–231 Fast Open - Slow Close 232–239 LED ON 240–247 RndStrob slow to fast 248–255 LED ON
8	Dimmer	0	0–62 0 % 63–126 25 % 127–190 50 % 191–254 75 % 255–255 100 %
9	Pan Rotate	0	0–30 No Rotation 31–140 CW Fast to Slow 141–145 Stop 146–255 CCW Slow to Fast
10	Color Macro1	0	0–25 No Function 26–205 Color Macros 206–255 Color Changing Fast to Slow

12 ch (continued)

Ch	Function	Default	DMX values
11	Position Effect	0	0–55 No Function 56–75 Sound Active 76–105 Red Clockwise Rotation 106–135 Blue Counter-Clockwise 136–165 7 Color Change CW 166–195 7 Color Change CCW 196–225 7 Color Change with Strobe CW 226–255 7 Color Change with Strobe CCW
12	Function	0	0–69 No Function 70–85 Reset 86–255 No Function