
ACME

ACME STAGE PAR 100 IP WW (LED-PAR 100 WW IP)

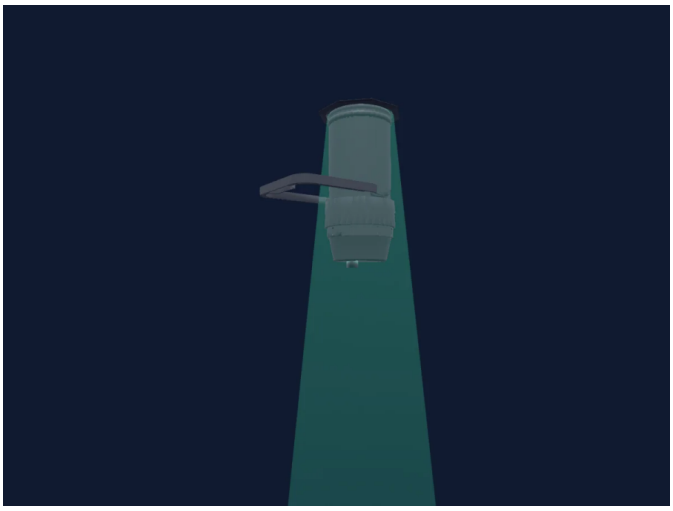

Manufacturer	**ACME**
Type	**PAR**
DMX modes	**3**
DMX footprint	**1, 2, 3 channels**
Beam angle	**15°**
Size (W × H × D)	**249 × 395 × 441 mm**
GDTF fixture type	**489FB29D-6FA6-4F72-91CE-32…**

Controls

Strobe · Dimmer

DMX modes

Mode1 1DMX	1 ch
Mode 2 2DMX	2 ch
Mode 3 3DMX	3 ch

Mode1 1DMX

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	

Mode 2 2DMX

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–5 Open1 6–122 min Strobe 123–123 max Strobe 124–127 Open2 128–168 Shutter Random 1 · Shutter Ran1 8–12 Hz 169–208 Shutter Random 2 · Shutter Ran2 13–16 Hz 209–249 Shutter Random 3 · Shutter Ran3 17–20 Hz 250–255 Open3

Mode 3 3DMX

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–5 Open1 6–122 min Strobe 123–123 max Strobe 124–127 Open2 128–168 Shutter Random 1 · Shutter Ran1 8–12 Hz 169–208 Shutter Random 2 · Shutter Ran2 13–16 Hz 209–249 Shutter Random 3 · Shutter Ran3 17–20 Hz 250–255 Open3