
BeamZ

BTF440Z Mini Fresnel

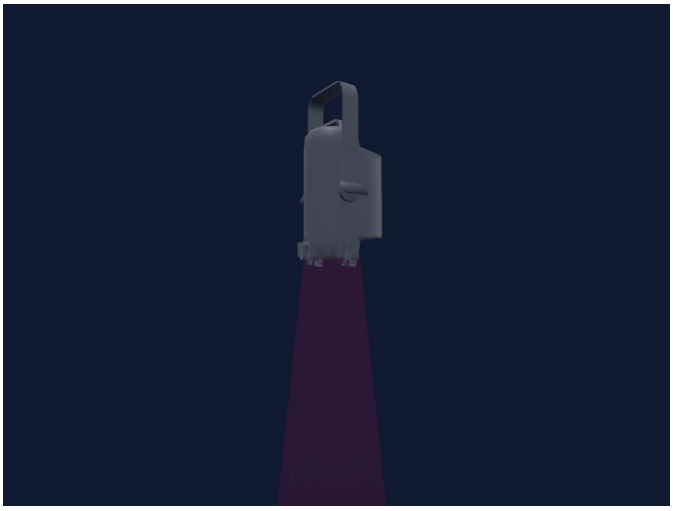

Manufacturer	**BeamZ**
Type	**Spot**
DMX modes	**7**
DMX footprint	**3, 4, 5, 6, 11 channels**
Beam angle	**14°**
Size (W × H × D)	**100 × 260 × 150 mm**
GDTF fixture type	**C6D06032-AD9B-47EB-8F1D-85…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

3 channel HSV	3 ch
3 channels	3 ch
4 channels	4 ch
4 channels AR1D	4 ch
5 channels AR2D	5 ch
6 channels AR2S	6 ch
11 channels STAG	11 ch

3 channel HSV

3 channels

Ch	Function	Default	DMX values
1	H SBHue	0	
2	H SBSaturation	0	
3	Color Control	0	

3 channels

3 channels

Ch	Function	Default	DMX values
1	Color RGBRed	0	
2	Color RGBGreen	0	
3	Color RGBBlue	0	

4 channels

4 channels

Ch	Function	Default	DMX values
1	Color RGBRed	0	
2	Color RGBGreen	0	
3	Color RGBBlue	0	
4	White	0	

4 channels AR1D

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	0	
3	Color RGBGreen	0	
4	Color RGBBlue	0	

5 channels AR2D

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	0	
3	Color RGBGreen	0	
4	Color RGBBlue	0	
5	White	0	

6 channels AR2S

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	0	
3	Color RGBGreen	0	
4	Color RGBBlue	0	
5	White	0	
6	Strobe Mode Shutter	0	

11 channels STAG

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	0	
3	Color RGBGreen	0	
4	Color RGBBlue	0	
5	White	0	
6	Color Control	0	0–10 No function 11–30 Color intensity 1 31–50 Color intensity 2 51–70 Color intensity 3 71–90 Color intensity 4 91–110 Color intensity 5 111–130 Color intensity 6 131–150 Color intensity 7 151–170 Color intensity 8 171–200 Color intensity 9 201–220 3200K 221–255 5600K
7	Shutter / Strobe	0	0–12 Strobe off 13–255 Strobe speed
8	Effect	0	0–20 No function 21–30 Auto 1 31–40 Auto 2 41–50 Auto 3 51–60 Auto 4 61–70 Auto 5 71–80 Auto 6 81–90 Auto 7 91–100 Auto 8 101–110 Auto 9 111–120 Auto 10 121–255 No function
9	Effect Speed	0	
10	Dimmer Mode	0	0–5 No function 6–55 Dimmer speed 0 56–105 Dimmer speed 1 106–155 Dimmer speed 2 156–205 Dimmer speed 3 206–255 Dimmer speed 4
11	D MXInput	0	0–9 All ID 10–19 ID 1 20–29 ID 2 30–39 ID 3 40–199 No function 200–209 ID 20 210–210 ID 21 211–212 No function 213–255 ID 66