
ACME

Stage Blinder IP

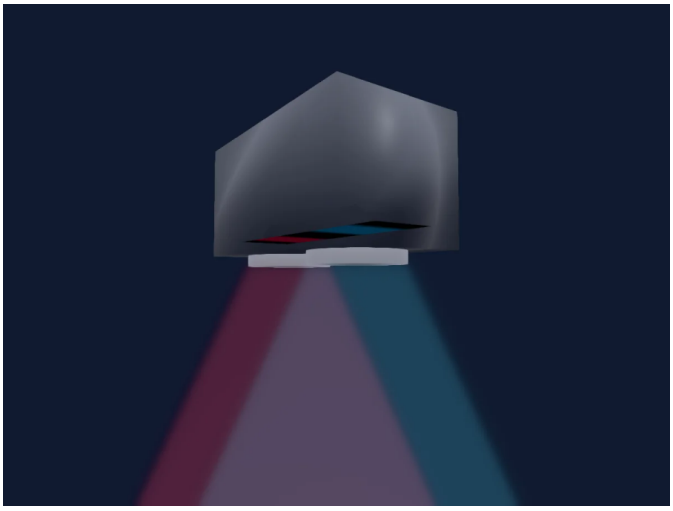

Manufacturer	**ACME**
Type	**Blinder**
DMX modes	**1**
DMX footprint	**4 channels**
Beam angle	**50°**
Size (W × H × D)	**400 × 200 × 215 mm**
GDTF fixture type	**07FDC5B7-B676-4B4A-9A6C-60…**

Controls

Strobe · Dimmer

DMX modes

4 Channel — 4 ch

4 Channel

4 channels

Ch	Function	Default	DMX values
1	Dimmer	255	0–254 closed 255–255 open
2	Dimmer	255	0–254 closed 255–255 open
3	Dimmer	0	0–254 closed 255–255 open
4	Shutter / Strobe	0	0–5 open 6–122 min Strobe 123–123 max Strobe 124–127 open2 128–184 Shutter1StrobeRandom 4 · min Rnd 1–24.6 Hz 185–185 Shutter1StrobeRandom 4 · max Rnd 25 Hz 186–190 open3 191–248 Shutter1StrobeRandom 6 · min Rnd2 1–24.6 Hz 249–249 Shutter1StrobeRandom 6 · max Rnd2 25 Hz 250–255 open4