
Chauvet Professional

COLORado 1-Tri Tour

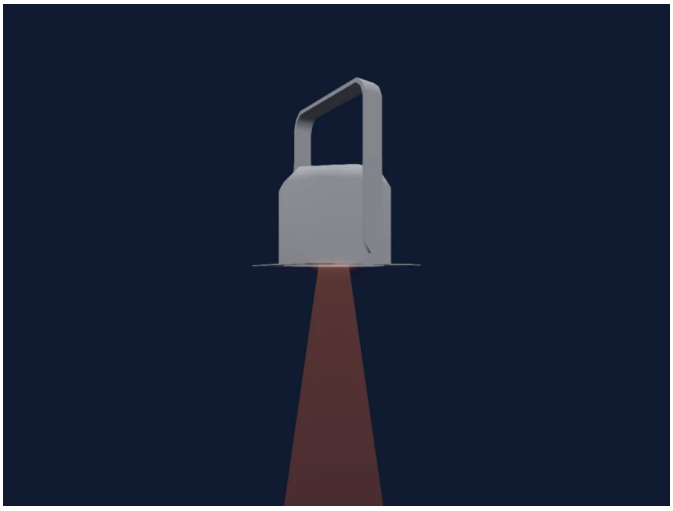

Manufacturer	**Chauvet Professional**
Type	**PAR**
DMX modes	**5**
DMX footprint	**3, 4, 5, 10 channels**
Beam angle	**17°**
Size (W × H × D)	**210 × 270 × 35 mm**
GDTF fixture type	**A6A7984C-FF88-4A98-B7FA-8C…**

Controls

Hue and saturation · RGB colour mixing · Colour wheel · Dimmer

DMX modes

ARC1	3 ch
HSV	3 ch
AR1D	4 ch
AR1S	5 ch
Tour	10 ch

ARC1

3 channels

Ch	Function	Default	DMX values
1	Color RGBRed	0	
2	Color RGBGreen	0	
3	Color RGBBlue	0	

HSV

3 channels

Ch	Function	Default	DMX values
1	H SBHue	0	
2	H SBSaturation	0	
3	H SBBrightness	0	

AR1D

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	0	
3	Color RGBGreen	0	
4	Color RGBBlue	0	

AR1S

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	0	
3	Color RGBGreen	0	
4	Color RGBBlue	0	
5	Strobe Frequency	0	0–10 No Function 11–255 0-20 Hz

Tour

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	255	
3	Green	255	
4	Blue	255	

Tour (continued)

Ch	Function	Default	DMX values
5	Color Macro1	0	0–10 No Function 11–30 Red 100% / Green Up / Blue 0% 31–50 Red Down / Green 100% / Blue 0% 51–70 Red 0% / Green 100% / Blue Up 71–90 Red 0% / Green Down / Blue 100% 91–110 Red Up / Green 0% / Blue 100% 111–130 Red 100% / Green 0% / Blue Down 131–150 Red 100% / Green Up / Blue Up 151–170 Red Down / Green Down / Blue 100% 171–200 Red 100% / Green 100% / Blue 100% 201–205 White 1 206–210 White 2 211–215 White 3 216–220 White 4 221–225 White 5 226–230 White 6 231–235 White 7 236–240 White 8 241–245 White 9 246–250 White 10 251–255 White 11
6	Strobe Mode Strobe	0	0–10 No Function 11–255 0-20 Hz
7	Auto	0	0–20 No Function 21–30 Auto 1 31–40 Auto 2 41–50 Auto 3 51–60 Auto 4 61–70 Auto 5 71–80 Auto 6 81–90 Auto 7 91–100 Auto 8 101–110 Auto 9 111–120 Auto 10 121–130 Custom 1 131–140 Custom 2 141–150 Custom 3 151–160 Custom 4 161–170 Custom 5 171–180 Custom 6 181–190 Custom 7 191–200 Custom 8 201–210 Custom 9 211–220 Custom 10 221–255 No Function
8	Auto Speed	0	
9	Dimmer Speed	0	0–9 Use dimmer speed from control panel 10–29 Linear dimmer 30–69 Non-linear dimmer 1 (fastest) 70–129 Non-linear dimmer 2 130–189 Non-linear dimmer 3 190–255 Non-linear dimmer 4 (slowest)
10	I DAddress	0	