
Aputure

LS600d pro

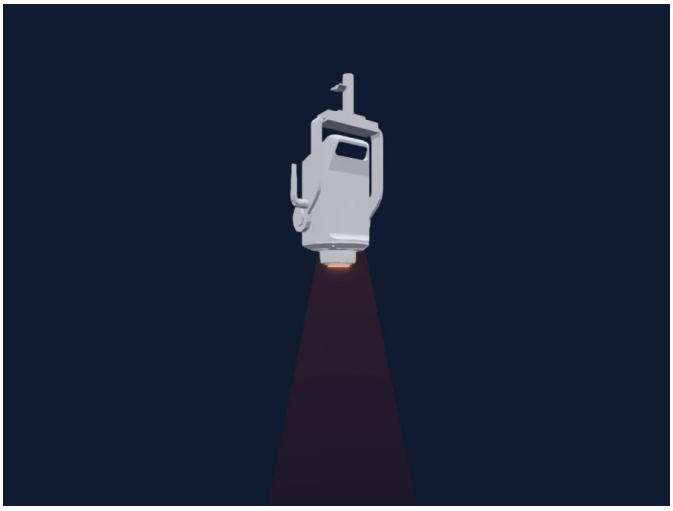

Manufacturer	**Aputure**
Type	**Effect light**
DMX modes	**1**
DMX footprint	**5 channels**
Beam angle	**25°**
Size (W × H × D)	**150 × 463 × 237 mm**
GDTF fixture type	**F94C789C-45F7-41DF-9AF2-A2…**

Controls

Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

Lighting-Effects Mode 8Bit	5 ch

Lighting-Effects Mode 8Bit

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 closed 255–255 open
2	Mode	0	0–127 Lighting Mode 128–255 Effects Mode
3	Effect	0	0–19 Paparazzi 20–39 Fireworks 40–59 Faulty bulb 60–79 Lightning 80–99 TV 100–119 Pulsing 120–139 Strobe 140–159 Explosion 160–255 Reserved
4	Velocity	0	0–19 1 20–39 2 40–59 3 60–79 4 80–99 5 100–119 6 120–139 7 140–159 8 160–179 9 180–199 10 200–219 Random 220–255 Reserved
5	Control1	0	0–10 stop 11–127 trigger 128–255 loop