
Ignition

2Bright Blind

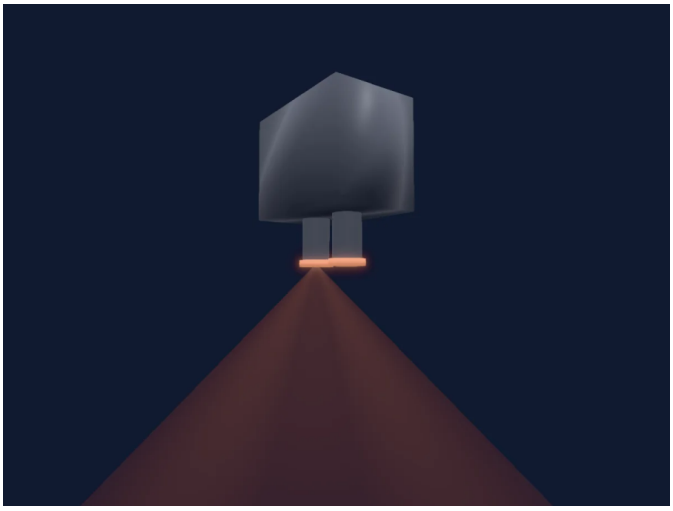

Manufacturer	**Ignition**
Type	**Blinder**
DMX modes	**1**
DMX footprint	**12 channels**
Beam angle	**90°**
Heads / cells	**2**
Size (W × H × D)	**400 × 300 × 250 mm**
GDTF fixture type	**49914CBA-3C2B-47D4-919E-81…**

Controls

Dimmer · Pixel control

DMX modes

12Ch — 12 ch

12Ch

12 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Mode Strobe	0	0–5 LEDs On 6–10 LEDs Off (Blackout) 11–33 Strobe Random Speed 0-100 34–56 Rising Intensety Speed 0-100 57–79 decreasing Intensety Speed 0-100 80–102 Random Strobe Speed 0-100 103–127 Burst Effect 5s to 1s 128–250 Strobe Speed Rising 1Hz to 20Hz 251–255 LEDs Off
3	Red	255	
4	Green	255	
5	Blue	255	
6	White	255	
7	Red	255	
8	Green	255	
9	Blue	255	
10	White	255	
11	Dimmer Mode	0	0–5 No Function 6–127 Dim Like LED 128–255 Dim Like Conventional
12	Dimmer Curve	0	0–5 No Function 6–63 Linear Curve 64–127 Exponential Curve 128–191 Logarithmic Curve 192–255 S-Curve