
JMAZ PROFESSIONAL

Electro T5

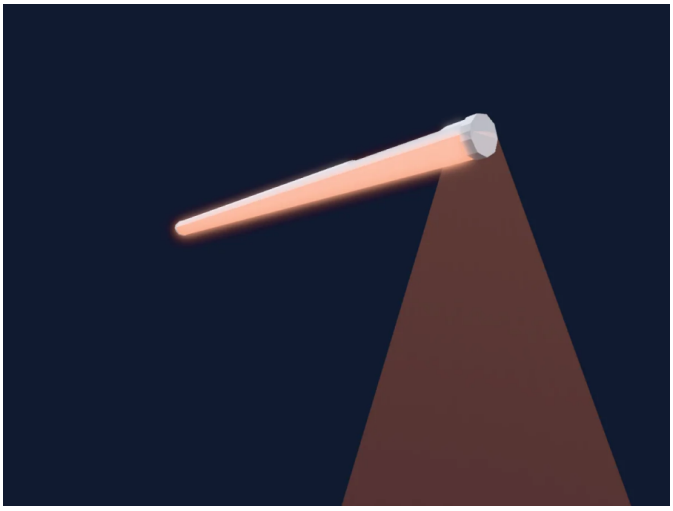

Manufacturer	**JMAZ PROFESSIONAL**
Type	**PAR**
DMX modes	**9**
DMX footprint	**4, 5, 6, 7, 12, 13 channels**
Beam angle	**35°**
Size (W × H × D)	**1190 × 51 × 52 mm**
GDTF fixture type	**65FA9A44-31DD-4BF9-AC84-D…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer

DMX modes

CCT-4CH	4 ch
HSI-4CH	4 ch
Pix16-80CH	5 ch
Pix32-160CH	5 ch
Pix8-40CH	5 ch
CCT/HSI-6CH	6 ch
RGBCW+S-7CH	7 ch
Macro-12CH	12 ch
16Bit-13CH	13 ch

CCT-4CH

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Shutter1Strobe 2 · Slow 0.5–7.97 Hz 255–255 Shutter1Strobe 2 · Fast 8 Hz
3	C TO	232	0–4 none 5–231 Min 232–232 Max 233–255 Off
4	Color Macro1	0	

HSI-4CH

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Shutter1Strobe 2 · Slow 0.5–7.97 Hz 255–255 Shutter1Strobe 2 · Fast 8 Hz
3	H SBHue	5	0–4 None 5–255 HSB_Hue
4	H SBSaturation	255	

Pix16-80CH

5 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Color Add WW	0	

Pix32-160CH

5 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Color Add WW	0	

Pix8-40CH

5 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Color Add WW	0	

CCT/HSI-6CH

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Shutter1Strobe 2 · Slow 0.5–7.97 Hz 255–255 Shutter1Strobe 2 · Fast 8 Hz
3	H SBHue	5	0–4 None 5–255 HSB_Hue 2
4	H SBSaturation	255	
5	C TO	0	0–4 none 5–231 Min 232–232 Max 233–255 Off
6	Color Macro1	0	

RGBCW+S-7CH

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Shutter1Strobe 2 · Slow 0.5–7.97 Hz 255–255 Shutter1Strobe 2 · Fast 8 Hz
3	Red	255	
4	Green	255	
5	Blue	255	
6	White	0	
7	Color Add WW	0	

Macro-12CH

12 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Shutter1Strobe 2 · Slow 0.5–7.97 Hz 255–255 Shutter1Strobe 2 · Fast 8 Hz
3	Static Macro	0	
4	Macro Backg Color	0	
5	Macro Backg Color Dim	0	
6	Color Macro1	0	0–10 None 11–214 Auto Macro 215–220 All auto macro 221–228 Sound control 1 229–236 Sound control 2 237–244 Sound control 3 245–255 Sound control 4
7	Color Macro1Rate	0	0–254 Slow 255–255 Fast
8	Red	255	
9	Green	255	
10	Blue	255	

Macro-12CH (continued)

Ch	Function	Default	DMX values
11	White	0	
12	Color Add WW	0	

16Bit-13CH

13 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–10 Open 11–254 Shutter1Strobe 2 · Slow 0.5–7.97 Hz 255–255 Shutter1Strobe 2 · Fast 8 Hz
4	Red	255	
5	Red Fine	255	Fine byte of Red
6	Green	255	
7	Green Fine	255	Fine byte of Green
8	Blue	255	
9	Blue Fine	255	Fine byte of Blue
10	White	0	
11	White Fine	0	Fine byte of White
12	Color Add WW	0	
13	Color Add WW Fine	0	Fine byte of Color Add WW