
Litecraft

# Beam X7

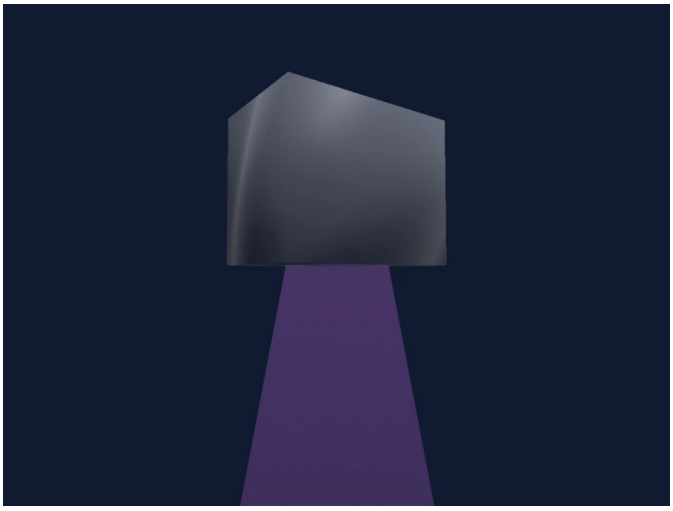

| | |
|---|---|
| Manufacturer | **Litecraft** |
| Type | **PAR** |
| DMX modes | **5** |
| DMX footprint | **2, 3, 4, 5, 10 channels** |
| Beam angle | **25°** |
| Size (W × H × D) | **250 × 300 × 370 mm** |
| GDTF fixture type | **42DBB68D-B79D-4618-BD2E-3…** |

## Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

## DMX modes

| | |
|---|---|
| 2 Channel Mode | 2 ch |
| 3 Channel Mode | 3 ch |
| 4 Channel Mode | 4 ch |
| 5 Channel Mode | 5 ch |
| 10 Channel Mode | 10 ch |

## 2 Channel Mode

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Color Macro1 | 0 | 0–13 No Function<br>14–17 open (wheel slot 2)<br>18–22 Macro 2 (wheel slot 3)<br>23–27 Macro 3 (wheel slot 4)<br>28–32 Macro 4 (wheel slot 5)<br>33–37 Macro 5 (wheel slot 6)<br>38–42 Macro 6 (wheel slot 7)<br>43–47 Macro 7 (wheel slot 8)<br>48–52 Macro 8 (wheel slot 9)<br>53–57 Macro 9 (wheel slot 10)<br>58–62 Macro 10 (wheel slot 11)<br>63–67 Macro 11 (wheel slot 12)<br>68–72 Macro 12 (wheel slot 13)<br>73–77 Macro 13 (wheel slot 14)<br>78–82 Macro 14 (wheel slot 15)<br>83–87 Macro 15 (wheel slot 16)<br>88–92 Macro 16 (wheel slot 17)<br>93–99 Macro 17 (wheel slot 18)<br>100–105 Macro 18 (wheel slot 19)<br>106–111 Macro 19 (wheel slot 20)<br>112–117 Macro 20 (wheel slot 21)<br>118–123 Macro 21 (wheel slot 22)<br>124–129 Macro 22 (wheel slot 23)<br>130–135 Macro 23 (wheel slot 24)<br>136–141 Macro 24 (wheel slot 25)<br>142–147 Macro 25 (wheel slot 26)<br>148–153 Macro 26 (wheel slot 27)<br>154–159 Macro 27 (wheel slot 28)<br>160–165 Macro 28 (wheel slot 29)<br>166–171 Macro 29 (wheel slot 30)<br>172–177 Macro 30 (wheel slot 31)<br>178–183 Macro 31 (wheel slot 32)<br>184–189 Macro 32 (wheel slot 33)<br>190–195 Macro 33 (wheel slot 34)<br>196–201 Macro 34 (wheel slot 35)<br>202–207 Macro 35 (wheel slot 36)<br>208–213 Macro 36 (wheel slot 37)<br>214–219 Macro 37 (wheel slot 38)<br>220–225 Macro 38 (wheel slot 39)<br>226–231 Macro 39 (wheel slot 40)<br>232–237 Macro 40 (wheel slot 41)<br>238–243 Macro 41 (wheel slot 42)<br>244–249 Macro 42 (wheel slot 43)<br>250–255 Macro 43 (wheel slot 44) |
| 2 | Dimmer | 0 | |

## 3 Channel Mode

3 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |
| 3 | Blue | 255 | |

## 4 Channel Mode

4 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |

### 4 Channel Mode (continued)

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 3 | Blue | 255 | |
| 4 | White | 0 | |

## 5 Channel Mode

5 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |
| 3 | Blue | 255 | |
| 4 | White | 0 | |
| 5 | Dimmer | 0 | |

## 10 Channel Mode

10 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |
| 3 | Blue | 255 | |
| 4 | White | 0 | |

## 10 Channel Mode (continued)

| Ch | Function | Default | DMX values |
|---|---|---|---|
| **5** | Color Macro1 | 0 | 0–13 No Function<br>14–17 open (wheel slot 2)<br>18–22 Macro 2 (wheel slot 3)<br>23–27 Macro 3 (wheel slot 4)<br>28–32 Macro 4 (wheel slot 5)<br>33–37 Macro 5 (wheel slot 6)<br>38–42 Macro 6 (wheel slot 7)<br>43–47 Macro 7 (wheel slot 8)<br>48–52 Macro 8 (wheel slot 9)<br>53–57 Macro 9 (wheel slot 10)<br>58–62 Macro 10 (wheel slot 11)<br>63–67 Macro 11 (wheel slot 12)<br>68–72 Macro 12 (wheel slot 13)<br>73–77 Macro 13 (wheel slot 14)<br>78–82 Macro 14 (wheel slot 15)<br>83–87 Macro 15 (wheel slot 16)<br>88–92 Macro 16 (wheel slot 17)<br>93–99 Macro 17 (wheel slot 18)<br>100–105 Macro 18 (wheel slot 19)<br>106–111 Macro 19 (wheel slot 20)<br>112–117 Macro 20 (wheel slot 21)<br>118–123 Macro 21 (wheel slot 22)<br>124–129 Macro 22 (wheel slot 23)<br>130–135 Macro 23 (wheel slot 24)<br>136–141 Macro 24 (wheel slot 25)<br>142–147 Macro 25 (wheel slot 26)<br>148–153 Macro 26 (wheel slot 27)<br>154–159 Macro 27 (wheel slot 28)<br>160–165 Macro 28 (wheel slot 29)<br>166–171 Macro 29 (wheel slot 30)<br>172–177 Macro 30 (wheel slot 31)<br>178–183 Macro 31 (wheel slot 32)<br>184–189 Macro 32 (wheel slot 33)<br>190–195 Macro 33 (wheel slot 34)<br>196–201 Macro 34 (wheel slot 35)<br>202–207 Macro 35 (wheel slot 36)<br>208–213 Macro 36 (wheel slot 37)<br>214–219 Macro 37 (wheel slot 38)<br>220–225 Macro 38 (wheel slot 39)<br>226–231 Macro 39 (wheel slot 40)<br>232–237 Macro 40 (wheel slot 41)<br>238–243 Macro 41 (wheel slot 42)<br>244–249 Macro 42 (wheel slot 43)<br>250–255 Macro 43 (wheel slot 44) |
| **6** | Shutter / Strobe | 0 | 0–20 No Function<br>21–254 Strobe · Min 1–12 Hz<br>255–255 Strobe · Max 12 Hz |
| **7** | Control1 | 0 | 0–20 No Function<br>21–99 Color Bump<br>100–149 Color Chase<br>150–255 No Function |
| **8** | Global MSpeed | 0 | |
| **9** | Dimmer Mode | 0 | 0–20 Modus Menu<br>21–49 Dimmer linear<br>50–99 Dimmer Curve 1<br>100–149 Dimmer Curve 2<br>150–199 Dimmer Curve 3<br>200–255 Dimmer Curve 4 |
| **10** | Dimmer | 0 | |