
Prolights

EclFresnelJVW

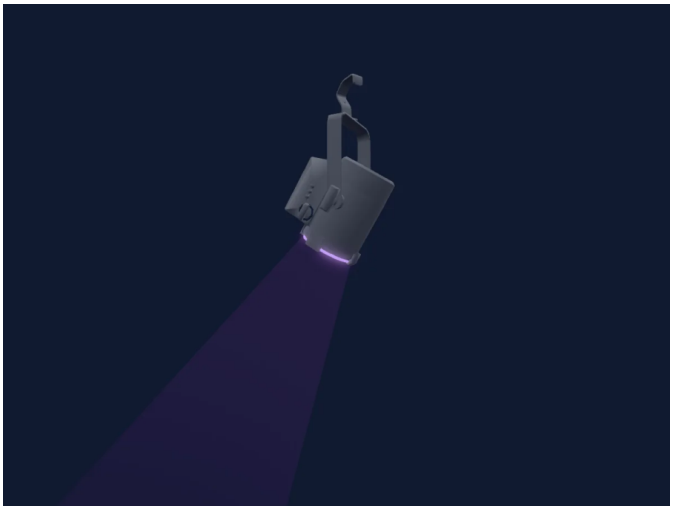

Manufacturer	**Prolights**
Type	**Moving head**
DMX modes	**5**
DMX footprint	**1, 2, 3, 5, 11 channels**
Beam angle	**15-47°**
Pan range	**360°**
Tilt range	**360°**
Size (W × H × D)	**222 × 247 × 231 mm**
GDTF fixture type	**18211AA9-318F-428E-83F9-85B…**

Controls

Extra LED colours · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Fixture reset · Service functions · Strobe

DMX modes

UNO_1ch	1 ch
DUO_2ch	2 ch
Basic_3ch	3 ch
Standard_5ch	5 ch
Extended_11ch	11 ch

UNO_1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

DUO_2ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	C TC	128	0–254 2700K 255–255 5600K

Basic_3ch

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Color Add WW	255	
3	White	255	

Standard_5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	63	0–1 Closed 2–62 Strobe 63–64 Open 65–125 PulseInStrobe 126–127 Open 128–188 PulseOutStrobe 189–190 Open 191–251 RandomStrobe 252–255 Open
4	C TC	128	0–254 2700K 255–255 5600K
5	C TC Fine	128	Fine byte of C TC

Extended_11ch

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	63	0–1 Closed 2–62 Strobe 63–64 Open 65–125 PulseInStrobe 126–127 Open 128–188 PulseOutStrobe 189–190 Open 191–251 RandomStrobe 252–255 Open

Extended_11ch (continued)

Ch	Function	Default	DMX values
4	C TC	128	0–254 2700K 255–255 5600K
5	C TC Fine	128	Fine byte of C TC
6	Color XFade	0	0–254 CTC 255–255 ColorMix
7	Color Add WW	255	
8	Color Add WW Fine	255	Fine byte of Color Add WW
9	White	255	
10	White Fine	255	Fine byte of White
11	Control1	0	0–1 NoFeature 2–3 Display ON 4–5 Display 10s 6–7 Display 20s 8–9 Display 30s 10–11 Flip Display ON 12–13 Flip Display OFF 14–15 Key Lock ON 16–17 Key Lock OFF 18–19 Linear 20–21 S-Curve 22–23 Square Law 24–25 Inverse Square Law 26–27 Auto 28–29 Fast 30–31 Medium 32–33 Slow 34–35 600 Hz 36–37 1200 Hz 38–39 2000 Hz 40–41 4000 Hz 42–43 6000 Hz 44–45 25 KHz 46–47 AUTO 48–49 Silent 50–51 High 52–53 OFF 54–55 Hold 56–57 BlackOut 58–59 StandAlone 60–253 Reserved 254–255 Control Features Factory Default