
Prolights

# EclMiniDAT3000Profile36

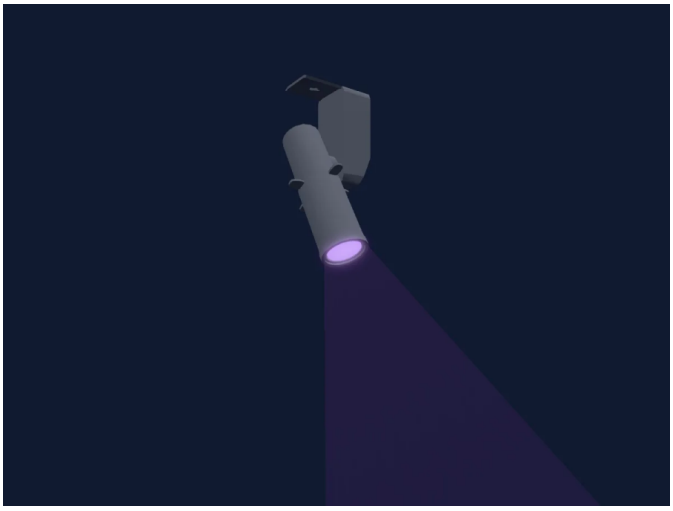

| | |
|---|---|
| Manufacturer | **Prolights** |
| Type | **Profile spot** |
| DMX modes | **4** |
| DMX footprint | **1, 2, 3, 4 channels** |
| Beam angle | **34.6°** |
| Tilt range | **280°** |
| Size (W × H × D) | **66 × 100 × 63 mm** |
| GDTF fixture type | **0EAEE617-358C-435C-AC87-19…** |

## Controls

Strobe · Dimmer

## Safety-relevant functions

Fixture reset · Strobe

## DMX modes

| | |
|---|---|
| UNO | 1 ch |
| Basic | 2 ch |
| Standard | 3 ch |
| Extended | 4 ch |

## UNO

1 channel

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |

## Basic

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Dimmer Fine | 0 | Fine byte of Dimmer |

## Standard

3 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Dimmer Fine | 0 | Fine byte of Dimmer |
| 3 | Shutter / Strobe | 255 | 0–1 Closed<br>2–62 Strobe<br>63–64 Open<br>65–125 PulseInStrobe<br>126–127 Open<br>128–188 PulseOutStrobe<br>189–190 Open<br>191–251 RandomStrobe<br>252–255 Open |

## Extended

4 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Dimmer Fine | 0 | Fine byte of Dimmer |
| 3 | Shutter / Strobe | 255 | 0–1 Closed<br>2–62 Strobe<br>63–64 Open<br>65–125 PulseInStrobe<br>126–127 Open<br>128–188 PulseOutStrobe<br>189–190 Open<br>191–251 RandomStrobe<br>252–255 Open |

## Extended (continued)

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 4 | Control1 | 0 | 0–1 NoFeature<br>2–3 Linear<br>4–5 S-Curve<br>6–7 Square Law<br>8–9 Inverse Square Law<br>10–11 Auto<br>12–13 Fast<br>14–15 Medium<br>16–17 Slow<br>18–19 600 Hz<br>20–21 1200 Hz<br>22–23 2000 Hz<br>24–25 4000 Hz<br>26–27 6000 Hz<br>28–29 25 KHz<br>30–31 STAND ALONE MASTER DMX<br>32–33 STAND ALONE MASTER NO DMX<br>34–35 STAND ALONE SLAVE<br>36–37 Hold<br>38–39 BlackOut<br>40–41 StandAlone<br>42–253 Reserved<br>254–255 Control Features Factory Default |