
CKC Lighting

IP H2O 100

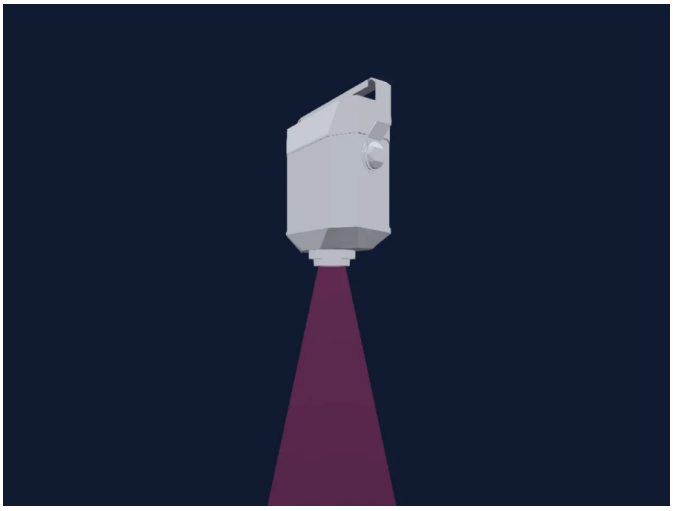

Manufacturer	**CKC Lighting**
Type	**PAR**
DMX modes	**1**
DMX footprint	**5 channels**
Beam angle	**25°**
Size (W × H × D)	**286 × 175 × 54 mm**
GDTF fixture type	**F23C70E9-B4FB-46B3-ADD2-EC…**

Controls

Colour wheel · Strobe · Dimmer · Gobo rotation

Safety-relevant functions

Strobe

DMX modes

5CH	5 ch

5CH

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 0% 255–255 100%
2	Shutter / Strobe	50	0–31 closed 32–63 open1 64–94 min strobe 95–95 max strobe 96–127 open2 128–158 min pulse 159–159 max pulse 160–191 open3 192–222 min random 223–223 max random 224–255 open4
3	Color Wheel	0	0–5 Color off(open) (wheel slot 1) 6–12 Open/Red (wheel slot 1) 13–19 Red (wheel slot 2) 20–26 Red/Orange (wheel slot 2) 27–33 Orange (wheel slot 3) 34–40 Orange/Yellow (wheel slot 3) 41–47 Yellow (wheel slot 4) 48–54 Yellow/Green (wheel slot 4) 55–61 Green (wheel slot 5) 62–68 Green/Cyan (wheel slot 5) 69–75 Cyan (wheel slot 6) 76–82 Cyan/Lavendel (wheel slot 6) 83–89 Lavendel (wheel slot 7) 90–96 Lavendel/Magenta (wheel slot 7) 97–103 Magenta (wheel slot 8) 104–110 Magenta/Open (wheel slot 8) 111–125 Open (wheel slot 1) 126–128 Stop 129–254 Slow CW 255–255 Fast CW
4	Gobo Rotation	0	0–0 Rot Off 1–126 Slow CCW 127–127 Fast CCW 128–254 Fast CW 255–255 Slow CW
5	Gobo Rotation	0	0–0 Rot Off 1–126 Slow CCW 127–127 Fast CCW 128–254 Fast CW 255–255 Slow CW