
CKC Lighting

Mini Profile 40

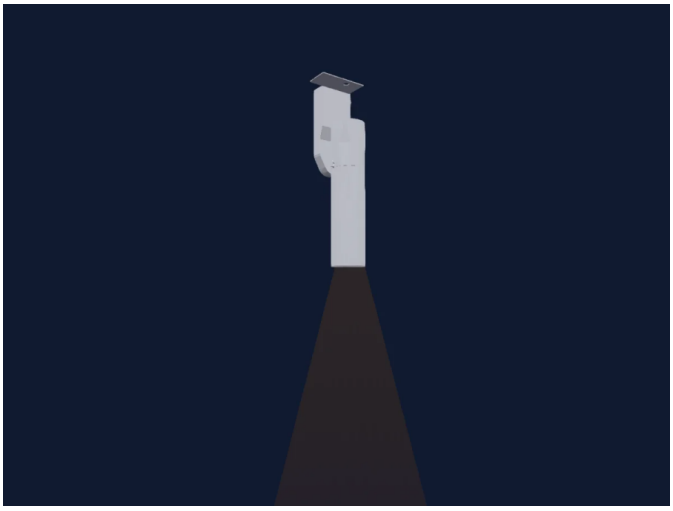

Manufacturer	**CKC Lighting**
Type	**Profile spot**
DMX modes	**3**
DMX footprint	**1, 2, 4 channels**
Beam angle	**30°**
Size (W × H × D)	**92 × 193 × 121 mm**
GDTF fixture type	**3F42D7EF-7D25-4381-A556-6D…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

1CH	1 ch
2CH	2 ch
4CH	4 ch

1CH

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2CH

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	50	0–31 Shutter Closed 32–63 No Function (Shutter Open) 64–94 Min Strobe 95–95 Max Strobe 96–127 No Function (Shutter Open) 128–158 Min Pulse 159–159 Max Pulse 160–191 No Function (Shutter Open) 192–222 Min Random 223–223 Max Random 224–255 No Function (Shutter Open)

4CH

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	50	0–31 Shutter Closed 32–63 No Function (Shutter Open) 64–94 Min Strobe 95–95 Max Strobe 96–127 No Function (Shutter Open) 128–158 Min Pulse 159–159 Max Pulse 160–191 No Function (Shutter Open) 192–222 Min Random 223–223 Max Random 224–255 No Function (Shutter Open)
3	Dimmer Mode	0	0–20 LED 21–40 Halogen 41–255 No Function
4	Dimmer Curve	0	0–20 Dimmer Curve Linear 21–40 Dimmer Curve Square 41–60 Dimmer Curve Inverse Square 61–80 Dimmer Curve S-Curve 81–255 No Function