
Coemar Lighting

# LEDko VariWhite HD

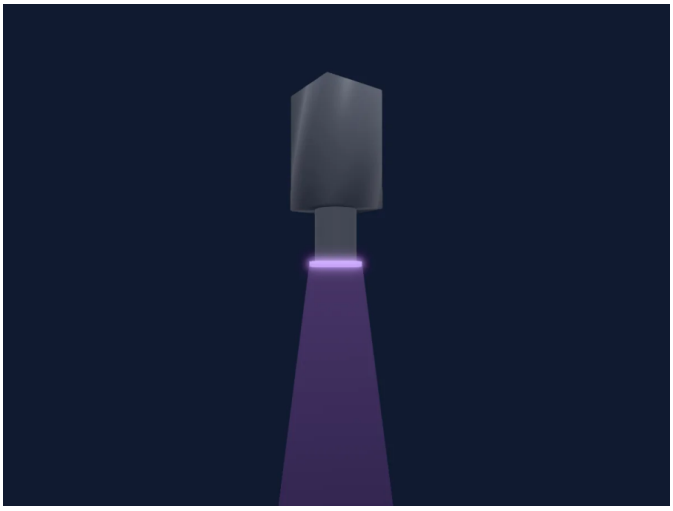

| | |
|---|---|
| Manufacturer | **Coemar Lighting** |
| Type | **PAR** |
| DMX modes | **3** |
| DMX footprint | **1, 2, 5 channels** |
| Beam angle | **19°** |
| Size (W × H × D) | **250 × 450 × 250 mm** |
| GDTF fixture type | **31E97BDB-969D-4084-AF6F-FC…** |

## Controls

Colour temperature · Dimmer

## Safety-relevant functions

Service functions

## DMX modes

| | |
|---|---|
| 1ch | 1 ch |
| 2ch | 2 ch |
| 5ch | 5 ch |

## 1ch

1 channel

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |

## 2ch

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | C TC | 0 | 0–254 2700K<br>255–255 6500K |

## 5ch

5 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Dimmer Fine | 0 | Fine byte of Dimmer |
| 3 | C TC | 0 | 0–6 2700K<br>7–33 2700K > 3200K<br>34–60 3200K<br>61–87 3200K > 4000K<br>88–114 4000K<br>115–141 4000K > 5000K<br>142–168 5000K<br>169–195 5000K > 5600K<br>196–222 5600K<br>223–249 5600K > 6500K<br>250–255 6500K |
| 4 | Shutter1Strobe | 0 | 0–9 Open<br>10–56 Min<br>57–57 Max<br>58–59 Open<br>60–107 Min<br>108–108 Max<br>109–110 Open<br>111–158 Min<br>159–159 Max<br>160–161 Open<br>162–206 Rnd Min<br>207–207 Rnd Max<br>208–209 Open<br>210–254 Min<br>255–255 Max |
| 5 | Control1 | 0 | 0–84 Control1 1<br>85–96 LOW Mode<br>97–108 STUDIO Mode<br>109–120 AUTO Mode<br>121–133 Min > Max<br>185–185 Display OFF<br>186–199 Display ON<br>200–255 No feature |