
Coemar Lighting

Risalto LED S VariWhite

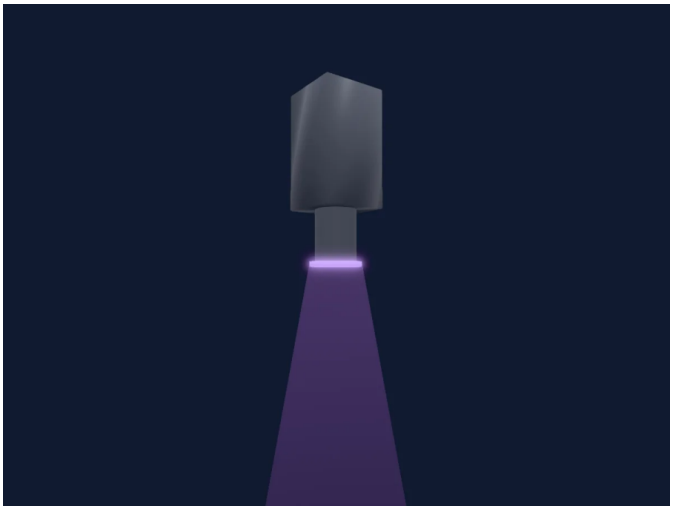

Manufacturer	**Coemar Lighting**
Type	**PAR**
DMX modes	**2**
DMX footprint	**1, 5 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 450 × 250 mm**
GDTF fixture type	**3E6D3312-81AD-48E5-A61C-6D…**

Controls

Colour temperature · Strobe · Dimmer

DMX modes

1CH	1 ch
5CH	5 ch

1CH

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

5CH

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Reserved 2	0	
3	C TC	0	0–35 2800 36–189 3200 190–254 5500 255–255 6500
4	Shutter / Strobe	0	0–9 Open 10–56 Shutter1Strobe 2 · Str Min 0.3–14.7 Hz 57–57 Shutter1Strobe 2 · Str Max 15 Hz 58–59 Open 60–108 StrobeModePulseClose 4 109–110 Open 111–159 StrobeModePulseOpen 6 160–161 Open 162–206 StrobeModeRandom 8 · Str Rnd Min 0.5–24.5 Hz 207–207 StrobeModeRandom 8 · Str Rnd Max 25 Hz 208–209 Open 210–255 StrobeModeRandom 10
5	Control1	0	0–84 Control1 1 85–96 Low Noise 97–108 Auto 109–120 Speed Control 121–133 Studio 134–185 Display Blackout ON 186–199 Display Blackout OFF 200–205 1000 HZ 206–211 3000 HZ 212–217 6000 HZ 218–223 8000 HZ 224–229 10000 HZ 230–235 12000 HZ 236–241 14000 HZ 242–247 16000 HZ 248–255 19000 HZ