
Eagle Lite

TA300Z PRO

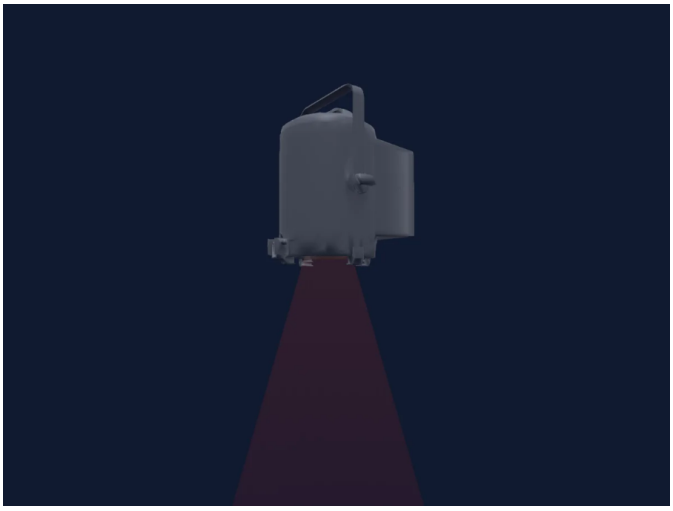

Manufacturer	**Eagle Lite**
Type	**Spot**
DMX modes	**4**
DMX footprint	**1, 2, 3, 4 channels**
Beam angle	**8-60°**
Size (W × H × D)	**295 × 451 × 428 mm**
GDTF fixture type	**C294FBE8-8AF3-4902-94D9-A0…**

Controls

Zoom · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

1 Channel Mode	1 ch
2 Channels Mode	2 ch
3 Channels Mode	3 ch
4 Channels Mode	4 ch

1 Channel Mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 MIn 63–126 25% 127–190 50% 191–254 75% 255–255 Max

2 Channels Mode

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 MIn 63–126 25% 127–190 50% 191–254 75% 255–255 Max
2	Zoom	0	0–62 Max 63–126 75% 127–190 50% 191–254 25% 255–255 Min

3 Channels Mode

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 MIn 63–126 25% 127–190 50% 191–254 75% 255–255 Max
2	Shutter / Strobe	0	0–1 Open 2–255 Strobe 0-100%
3	Zoom	0	0–62 Max 63–126 75% 127–190 50% 191–254 25% 255–255 Min

4 Channels Mode

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–63 MIn 64–127 25% 128–190 50% 191–254 75% 255–255 Max
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–1 Open 2–255 Strobe 0-100%
4	Zoom	0	0–62 Max 63–126 75% 127–190 50% 191–254 25% 255–255 Min