
Robert Juliat

Lucy

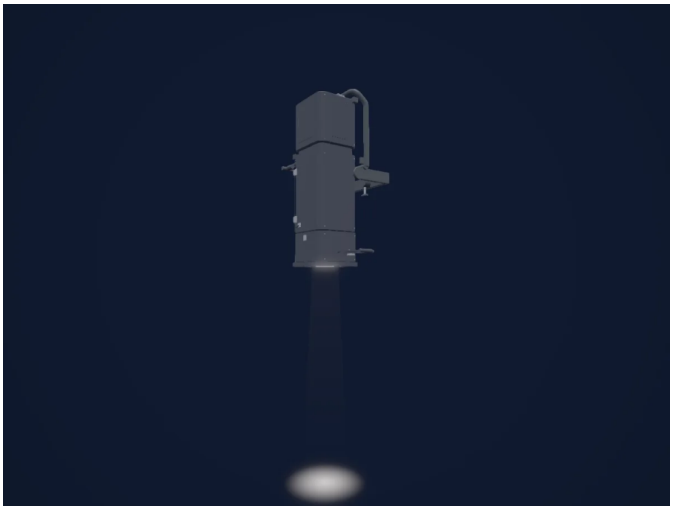

Manufacturer	**Robert Juliat**
Type	**Spot**
DMX modes	**4**
DMX footprint	**2, 3, 4 channels**
Beam angle	**10°**
Size (W × H × D)	**603 × 959 × 464 mm**
GDTF fixture type	**80EA110C-67D5-5BB6-9847-92…**

Controls

Dimmer

Safety-relevant functions

Lamp on and off · Fixture reset

DMX modes

Mode 1 - Local disabled required	2 ch
Mode 2 - Local disabled required	3 ch
Mode 3 - Local disabled required	3 ch
Mode 4 - Local disabled required	4 ch

Mode 1 - Local disabled required

2 channels

Ch	Function	Default	DMX values
1	Control	0	0–0 Value 0 (no command; value 0 is required to activate a ... 1–133 Not printed in the chart (1-133) 134–134 Dimmer Test (hold 3 seconds) 135–135 Dimmer Reset (hold 3 seconds) 136–143 Not printed in the chart (136-143) 144–144 CONTROL BOARD Test (hold 3 seconds) 145–145 CONTROL BOARD Reset (hold 3 seconds) 146–149 Not printed in the chart (146-149) 150–150 RJNET Reset (hold 3 seconds) 151–219 Not printed in the chart (151-219) 220–220 Local command = ON (hold 3 seconds) 221–224 Not printed in the chart (221-224) 225–225 Local command = OFF (DMX only) (hold 3 seconds) 226–229 Not printed in the chart (226-229) 230–230 Feedback flash light = OFF (hold 3 seconds) 231–234 Not printed in the chart (231-234) 235–235 Feedback flash light = ON (hold 3 seconds) 236–239 Not printed in the chart (236-239) 240–240 Backlight off-time = OFF (hold 3 seconds) 241–244 Not printed in the chart (241-244) 245–245 Backlight off-time = ON (hold 3 seconds) 246–255 Not printed for the 1200 W Lucy (250 Lamp OFF / 2...
2	Dimmer	0	

Mode 2 - Local disabled required

3 channels

Ch	Function	Default	DMX values
1	Control	0	0–0 Value 0 (no command; value 0 is required to activate a ... 1–133 Not printed in the chart (1-133) 134–134 Dimmer Test (hold 3 seconds) 135–135 Dimmer Reset (hold 3 seconds) 136–143 Not printed in the chart (136-143) 144–144 CONTROL BOARD Test (hold 3 seconds) 145–145 CONTROL BOARD Reset (hold 3 seconds) 146–149 Not printed in the chart (146-149) 150–150 RJNET Reset (hold 3 seconds) 151–219 Not printed in the chart (151-219) 220–220 Local command = ON (hold 3 seconds) 221–224 Not printed in the chart (221-224) 225–225 Local command = OFF (DMX only) (hold 3 seconds) 226–229 Not printed in the chart (226-229) 230–230 Feedback flash light = OFF (hold 3 seconds) 231–234 Not printed in the chart (231-234) 235–235 Feedback flash light = ON (hold 3 seconds) 236–239 Not printed in the chart (236-239) 240–240 Backlight off-time = OFF (hold 3 seconds) 241–244 Not printed in the chart (241-244) 245–245 Backlight off-time = ON (hold 3 seconds) 246–255 Not printed for the 1200 W Lucy (250 Lamp OFF / 2...
2	Dimmer	0	
3	Dimmer Fine	0	Fine byte of Dimmer

Mode 3 - Local disabled required

3 channels

Ch	Function	Default	DMX values

Mode 3 - Local disabled required (continued)

Ch	Function	Default	DMX values
1	Control	0	0–0 Value 0 (no command; value 0 is required to activate a ... 1–133 Not printed in the chart (1-133) 134–134 Dimmer Test (hold 3 seconds) 135–135 Dimmer Reset (hold 3 seconds) 136–143 Not printed in the chart (136-143) 144–144 CONTROL BOARD Test (hold 3 seconds) 145–145 CONTROL BOARD Reset (hold 3 seconds) 146–149 Not printed in the chart (146-149) 150–150 RJNET Reset (hold 3 seconds) 151–219 Not printed in the chart (151-219) 220–220 Local command = ON (hold 3 seconds) 221–224 Not printed in the chart (221-224) 225–225 Local command = OFF (DMX only) (hold 3 seconds) 226–229 Not printed in the chart (226-229) 230–230 Feedback flash light = OFF (hold 3 seconds) 231–234 Not printed in the chart (231-234) 235–235 Feedback flash light = ON (hold 3 seconds) 236–239 Not printed in the chart (236-239) 240–240 Backlight off-time = OFF (hold 3 seconds) 241–244 Not printed in the chart (241-244) 245–245 Backlight off-time = ON (hold 3 seconds) 246–255 Not printed for the 1200 W Lucy (250 Lamp OFF / 2...
2	Motorized dimmer shutter	0	
3	Dimmer Master maximum cap	255	

Mode 4 - Local disabled required

4 channels

Ch	Function	Default	DMX values
1	Control	0	0–0 Value 0 (no command; value 0 is required to activate a ... 1–133 Not printed in the chart (1-133) 134–134 Dimmer Test (hold 3 seconds) 135–135 Dimmer Reset (hold 3 seconds) 136–143 Not printed in the chart (136-143) 144–144 CONTROL BOARD Test (hold 3 seconds) 145–145 CONTROL BOARD Reset (hold 3 seconds) 146–149 Not printed in the chart (146-149) 150–150 RJNET Reset (hold 3 seconds) 151–219 Not printed in the chart (151-219) 220–220 Local command = ON (hold 3 seconds) 221–224 Not printed in the chart (221-224) 225–225 Local command = OFF (DMX only) (hold 3 seconds) 226–229 Not printed in the chart (226-229) 230–230 Feedback flash light = OFF (hold 3 seconds) 231–234 Not printed in the chart (231-234) 235–235 Feedback flash light = ON (hold 3 seconds) 236–239 Not printed in the chart (236-239) 240–240 Backlight off-time = OFF (hold 3 seconds) 241–244 Not printed in the chart (241-244) 245–245 Backlight off-time = ON (hold 3 seconds) 246–255 Not printed for the 1200 W Lucy (250 Lamp OFF / 2...
2	Motorized dimmer shutter	0	
3	Motorized dimmer shutter Fine	0	Fine byte of Motorized dimmer shutter
4	Dimmer Master maximum cap	255	

Fixture model: gdtf-robert-juliat-lucy-2611131301
Creator: HitLight
Modifications: Original HitLight 3D housing: scripted parametric geometry modelled by HitLight from public product photos and the manufactu...