
EK Lights

EPAR ULTRA WW

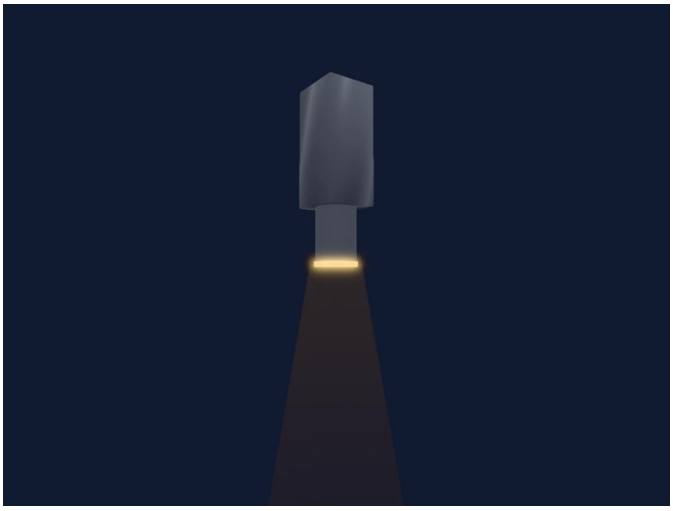

Manufacturer	**EK Lights**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**1, 2, 3, 6 channels**
Beam angle	**24°**
Size (W × H × D)	**208 × 450 × 193 mm**
GDTF fixture type	**D253E273-94F2-4B53-82FC-C9…**

Controls

Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

1CH	1 ch
2CH	2 ch
3CH	3 ch
6CH	6 ch

1CH

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2CH

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

3CH

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–10 Open 11–255 Strobe

6CH

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–10 Open 11–255 Strobe
4	Effect	0	0–10 No Function 11–85 Auto Program 1 86–170 Auto Program 2 171–255 Auto Program 3
5	Effect Speed	0	
6	Dimmer Mode	0	0–51 Fixture Preset 52–101 Mode Off 102–152 Mode 1 (Fast) 153–203 Mode 2 (Mid) 204–255 Mode 3 (Slow)