
ELITE PROLIGHT

PAR 200 COB WW

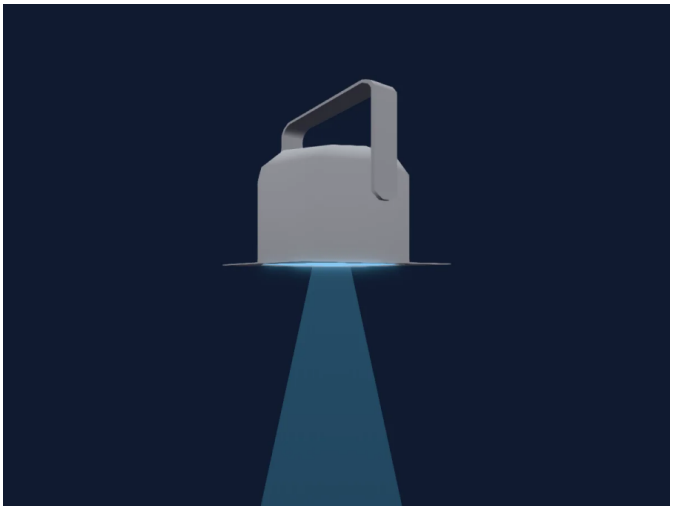

Manufacturer	**ELITE PROLIGHT**
Type	**PAR**
DMX modes	**2**
DMX footprint	**4, 8 channels**
Beam angle	**25°**
Size (W × H × D)	**215 × 140 × 35 mm**
GDTF fixture type	**E50FC58B-47FC-4AC4-B45E-28…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

4CH Basic Mode	4 ch
8CH Standard Mode	8 ch

4CH Basic Mode

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

8CH Standard Mode

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	2	0–2 No STROBE 3–254 MIN STROBE 255–255 MAX STROBE
3	Color Macro1	0	0–5 Empty 6–100 Color Gradual Change 101–150 Gradient 200–200 Pulse Changes 201–255 Sound Mode
4	Color Macro1Rate	0	0–254 Slow 255–255 Fast
5	Red	255	
6	Green	255	
7	Blue	255	
8	White	255	