
ELITE PROLIGHT

PAR 300 RGBW

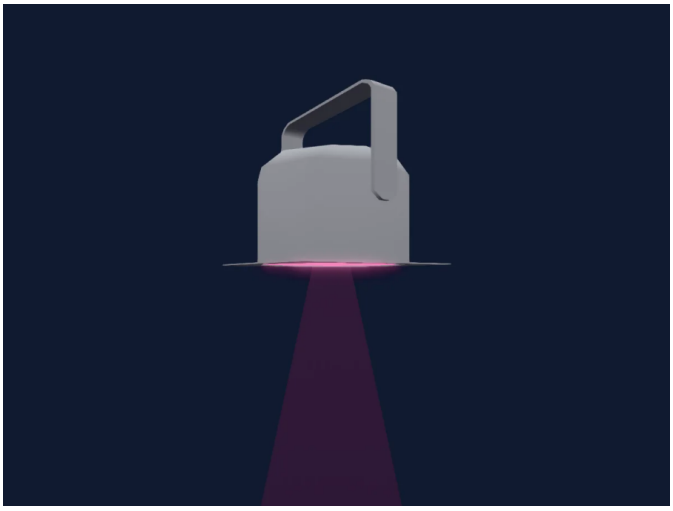

Manufacturer	**ELITE PROLIGHT**
Type	**Effect light**
DMX modes	**2**
DMX footprint	**4, 8 channels**
Beam angle	**25°**
Size (W × H × D)	**215 × 140 × 35 mm**
GDTF fixture type	**FCEA8CE7-0C1D-4BF8-A5E3-23…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

4CH Basic Mode	4 ch
8CH Standard Mode	8 ch

4CH Basic Mode

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

8CH Standard Mode

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Shutter / Strobe	5	0–5 No STROBE 6–254 MIN STROBE 255–255 MAX STROBE
7	Color Macro1Rate	0	0–254 Slow 255–255 Fast
8	Color Macro1	0	0–50 Close 51–100 Programme Color 101–150 Color Gradual Change 151–200 Color Fade 201–250 Color Jump 251–255 Sound Mode