
FOS Technologies

Blinder Innovative

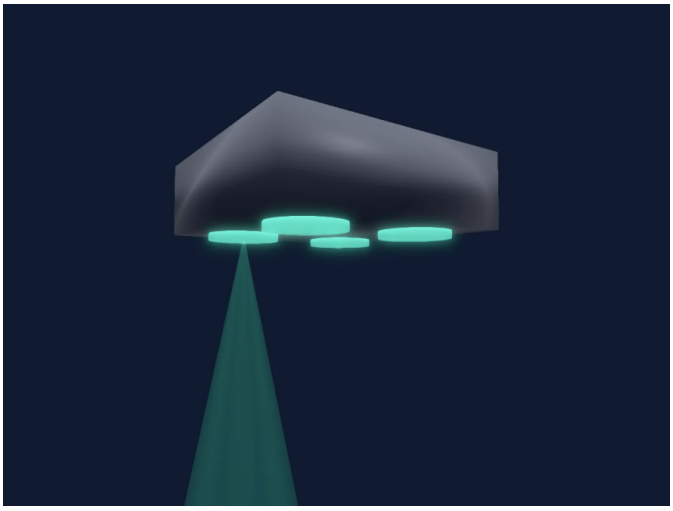

Manufacturer	**FOS Technologies**
Type	**Blinder**
DMX modes	**3**
DMX footprint	**1, 4, 9 channels**
Beam angle	**25°**
Size (W × H × D)	**380 × 120 × 380 mm**
GDTF fixture type	**6858EE52-6151-4914-B500-FBB…**

Controls

Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

1 Channel	1 ch
4 Channel	4 ch
9 Channel	9 ch

1 Channel

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

4 Channel

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Dimmer	0	0–254 Close 255–255 Open
3	Dimmer	0	0–254 Close 255–255 Open
4	Dimmer	0	0–254 Close 255–255 Open

9 Channel

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–10 Open 11–239 Shutter1Strobe 2 · Min 1–24.9 Hz 240–240 Shutter1Strobe 2 · Max 25 Hz 241–254 Shutter1StrobeRandom 3 · Min 1–23.3 Hz 255–255 Shutter1StrobeRandom 3 · Max 25 Hz
4	Dimmer	0	
5	Dimmer	0	
6	Dimmer	0	
7	Dimmer	0	
8	Effect	0	0–35 Open 36–70 Min 71–71 Max 72–106 Min 107–107 Max 108–214 Min 215–215 Max 216–254 Min 255–255 Max
9	Dimmer Curve	0	0–10 Default 11–40 Mode 1 (Fast) 41–80 Mode 2 (Medium) 81–120 Mode 3 (Slow) 121–255 Default