
Anolis

Divine 60 UV

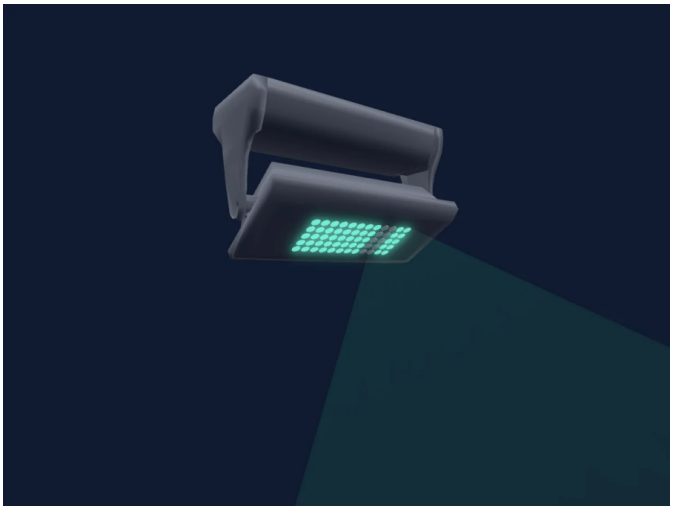

Manufacturer	**Anolis**
Type	**Moving head**
DMX modes	**3**
DMX footprint	**2, 3, 9 channels**
Beam angle	**38-100°**
Tilt range	**185°**
Size (W × H × D)	**441 × 96 × 206 mm**
GDTF fixture type	**80358D20-23FD-459A-AF45-53…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

Mode 1	2 ch
Mode 2	3 ch
Mode 3	9 ch

Mode 1

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

Mode 2

3 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	32	0–31 Shutter closed 32–63 Shutter open 64–94 Strobe min 95–95 Strobe max 96–127 Shutter open 128–142 Opening pulse slow 143–143 Opening pulse fast 144–158 Closing pulse fast 159–159 Closing pulse slow 160–191 Shutter open 192–222 Random strobe slow 223–223 Random strobe fast 224–255 Shutter open
2	Dimmer	0	0–254 Closed 255–255 Open
3	Dimmer Fine	0	Fine byte of Dimmer

Mode 3

9 channels

Ch	Function	Default	DMX values
1	Dimmer	255	0–254 Closed 255–255 Open
2	Dimmer	255	0–254 Closed 255–255 Open
3	Dimmer	255	0–254 Closed 255–255 Open
4	Dimmer	255	0–254 Closed 255–255 Open
5	Dimmer	255	0–254 Closed 255–255 Open
6	Dimmer	255	0–254 Closed 255–255 Open
7	Shutter / Strobe	32	0–31 Shutter closed 32–63 Shutter open 64–94 Strobe min 95–95 Strobe max 96–127 Shutter open 128–142 Opening pulse slow 143–143 Opening pulse fast 144–158 Closing pulse fast 159–159 Closing pulse slow 160–191 Shutter open 192–222 Random strobe slow 223–223 Random strobe fast 224–255 Shutter open
8	Dimmer	0	0–254 Closed 255–255 Open
9	Dimmer Fine	0	Fine byte of Dimmer