
JMAZ PROFESSIONAL

Electro T4

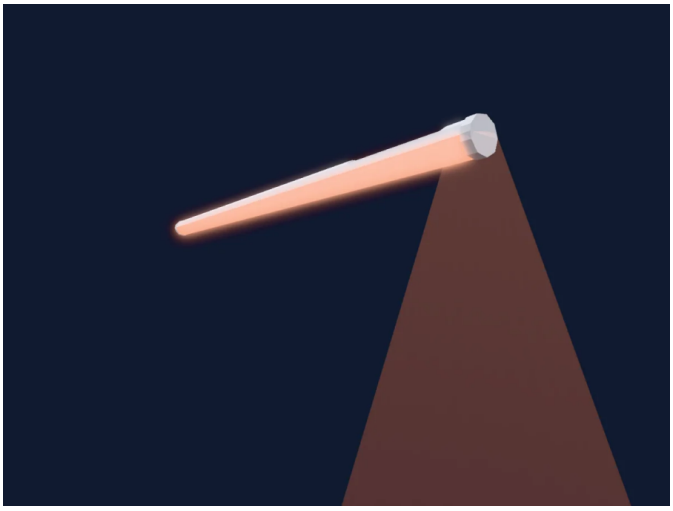

Manufacturer	**JMAZ PROFESSIONAL**
Type	**PAR**
DMX modes	**7**
DMX footprint	**2, 4, 6, 11 channels**
Beam angle	**35°**
Size (W × H × D)	**1190 × 51 × 52 mm**
GDTF fixture type	**9D8E387D-A03A-4DEB-B222-D…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer

DMX modes

2CH	2 ch
128CH	4 ch
32CH	4 ch
4CH	4 ch
64CH	4 ch
6CH	6 ch
11CH	11 ch

2CH

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	C TO	255	0–10 none 11–24 2800K 25–38 3000K 39–52 3200K 53–66 3500K 67–80 3800K 81–94 4000K 95–108 4500K 109–122 5000K 123–136 5600K 137–150 6000K 151–164 6500K 165–178 7000K 179–192 7500K 193–206 8000K 207–220 8500K 221–234 9000K 235–248 9500K 249–255 10000K

128CH

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

32CH

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

4CH

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

64CH

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	

64CH (continued)

Ch	Function	Default	DMX values
4	White	0	

6CH

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Shutter1Strobe 2 · Slow 0.5–7.97 Hz 255–255 Shutter1Strobe 2 · Fast 8 Hz
3	Red	255	
4	Green	255	
5	Blue	255	
6	White	0	

11CH

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Shutter1Strobe 2 · Slow 0.5–7.97 Hz 255–255 Shutter1Strobe 2 · Fast 8 Hz
3	Static Macro	0	
4	Macro Backg Color	0	
5	Macro Backg Color Dim	0	
6	Color Macro1	0	0–10 None 11–220 Auto Macro 221–228 Sound control 1 229–236 Sound control 2 237–244 None 245–255 Sound control 3
7	Color Macro1Rate	0	0–254 Slow 255–255 Fast
8	Red	255	
9	Green	255	
10	Blue	255	
11	White	0	