
ATON

Hue Par

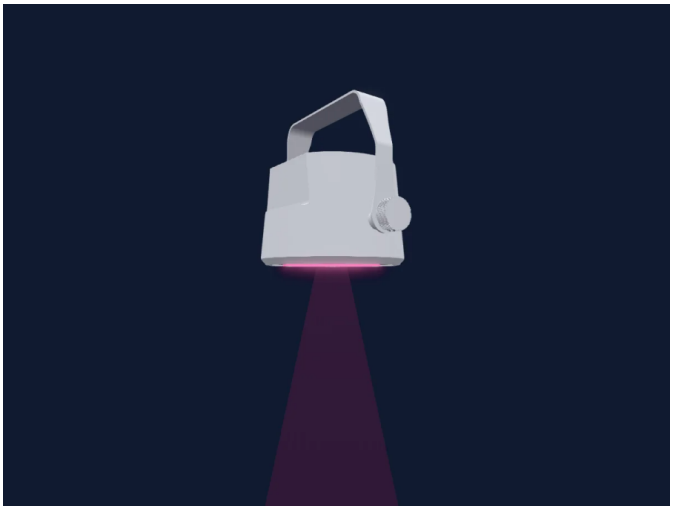

Manufacturer	**ATON**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**7, 9, 12, 19 channels**
Beam angle	**25°**
Size (W × H × D)	**258 × 173 × 40 mm**
GDTF fixture type	**B6381202-7D98-4B4D-A71C-EE…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

7 Channel	7 ch
9 Channel	9 ch
12 Channel	12 ch
19 Channel	19 ch

7 Channel

7 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	255	
5	Color Add RY	255	
6	UV	0	
7	Control1	0	0–49 Dimmer Speed 0 50–99 Dimmer Speed 1 100–149 Dimmer Speed 2 150–199 Dimmer Speed 3 200–255 Dimmer Speed 4

9 Channel

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Color Add RY	255	
7	UV	0	
8	Shutter / Strobe	0	0–9 Open 10–122 Strobe Slow 123–254 Strobe Med 255–255 Strobe Fast
9	Control1	0	0–49 Dimmer Speed 0 50–99 Dimmer Speed 1 100–149 Dimmer Speed 2 150–199 Dimmer Speed 3 200–255 Dimmer Speed 4

12 Channel

12 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	255	
6	Color Add RY	255	
7	UV	0	
8	Shutter / Strobe	0	0–9 Open 10–122 Strobe Slow 123–254 Strobe Med 255–255 Strobe Fast
9	C TO	0	

12 Channel (continued)

Ch	Function	Default	DMX values
10	Effect	0	0–20 Open 21–30 Auto 1 31–40 Auto 2 41–50 Auto 3 51–60 Auto 4 61–70 Auto 5 71–80 Auto 6 81–90 Auto 7 91–100 Auto 8 101–110 Auto 9 111–120 Auto 10 121–220 Sound Mode 221–255 NoFeature 1
11	Effect Speed	0	0–127 Slow 128–254 Medium 255–255 Fast
12	Control1	0	0–49 Dimmer Speed 0 50–99 Dimmer Speed 1 100–149 Dimmer Speed 2 150–199 Dimmer Speed 3 200–255 Dimmer Speed 4

19 Channel

19 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Red	255	
4	Red Fine	255	Fine byte of Red
5	Green	255	
6	Green Fine	255	Fine byte of Green
7	Blue	255	
8	Blue Fine	255	Fine byte of Blue
9	White	255	
10	White Fine	255	Fine byte of White
11	Color Add RY	255	
12	Color Add RY Fine	255	Fine byte of Color Add RY
13	UV	0	
14	UV Fine	0	Fine byte of UV
15	Shutter / Strobe	0	0–9 Open 10–122 Strobe Slow 123–254 Strobe Med 255–255 Strobe Fast
16	C TO	0	

19 Channel (continued)

Ch	Function	Default	DMX values
17	Effect	0	0–20 Open 21–30 Auto 1 31–40 Auto 2 41–50 Auto 3 51–60 Auto 4 61–70 Auto 5 71–80 Auto 6 81–90 Auto 7 91–100 Auto 8 101–110 Auto 9 111–120 Auto 10 121–255 NoFeature 1
18	Effect Speed	0	0–127 Slow 128–254 Medium 255–255 Fast
19	Control1	0	0–49 Dimmer Speed 0 50–99 Dimmer Speed 1 100–149 Dimmer Speed 2 150–199 Dimmer Speed 3 200–255 Dimmer Speed 4