
BeamZ

bs960

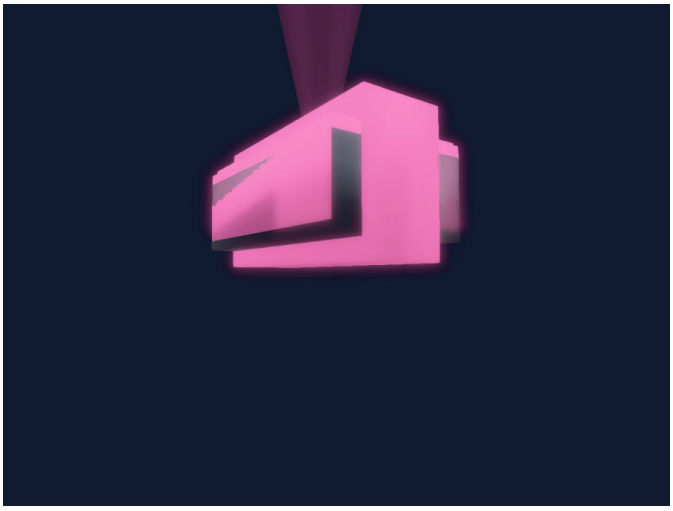

Manufacturer	**BeamZ**
Type	**Blinder**
DMX modes	**4**
DMX footprint	**4, 11, 32, 39 channels**
Beam angle	**25°**
Pan range	**1°**
Heads / cells	**8**
Size (W × H × D)	**480 × 150 × 275 mm**
GDTF fixture type	**27CEA0A0-AD1D-4078-A910-26…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer · Pixel control

DMX modes

4 Channels	4 ch
11 Channels	11 ch
32 Channels	32 ch
39 Channels	39 ch

4 Channels

4 channels

Ch	Function	Default	DMX values
1	Red	0	0–0 No Function 1–255 Red Dimmer
2	Green	0	0–0 No Function 1–255 Green Dimmer
3	Blue	0	0–0 No Function 1–255 Blue Dimmer
4	White	0	0–0 No Function 1–255 White Dimmer

11 Channels

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	1–5 No Function 6–250 Strobe Speed RGBW Full On 251–254 RGBW Full On 255–255 Special Strobe RGBW Full On
2	Strobe Mode Effect	0	1–5 No Function 6–250 Beam flash intensity 251–255 Red Full On
3	Strobe Mode Shutter	0	1–5 No Function 6–250 Beam Flash Intensity 251–255 Green Full On
4	Strobe Rate	0	1–5 No Function 6–250 Beam Flash Intensity 251–255 Blue Full On
5	Red	0	1–5 No Function 6–250 Beam Flash Intensity 251–255 White Full On
6	Green	0	
7	Blue	0	
8	White	0	
9	White Count	0	
10	Color Wheel Select MSpeed	0	
11	Color Consistency	0	

32 Channels

32 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Red	0	
5	Green	0	
6	Blue	0	
7	Red	0	
8	Green	0	
9	Blue	0	
10	Red	0	
11	Green	0	
12	Blue	0	

32 Channels (continued)

Ch	Function	Default	DMX values
13	Red	0	
14	Green	0	
15	Blue	0	
16	Red	0	
17	Green	0	
18	Blue	0	
19	Red	0	
20	Green	0	
21	Blue	0	
22	Red	0	
23	Green	0	
24	Blue	0	
25	White	0	
26	White	0	
27	White	0	
28	White	0	
29	White	0	
30	White	0	
31	White	0	
32	White	0	

39 Channels

39 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Mode Strobe	0	
3	Strobe Mode Shutter	0	
4	Strobe Rate	0	
5	Red	0	
6	Green	0	
7	Blue	0	
8	Red	0	
9	Green	0	
10	Blue	0	
11	Red	0	
12	Green	0	
13	Blue	0	
14	Red	0	
15	Green	0	
16	Blue	0	
17	Red	0	
18	Green	0	
19	Blue	0	
20	Red	0	
21	Green	0	

39 Channels (continued)

Ch	Function	Default	DMX values
22	Blue	0	
23	Red	0	
24	Green	0	
25	Blue	0	
26	Red	0	
27	Green	0	
28	Blue	0	
29	White Count	0	
30	Color Wheel Select MSpeed	0	
31	Color Consistency	0	
32	White	0	
33	White	0	
34	White	0	
35	White	0	
36	White	0	
37	White	0	
38	White	0	
39	White	0	