
BeamZ

LCB144 LED Colour Bar

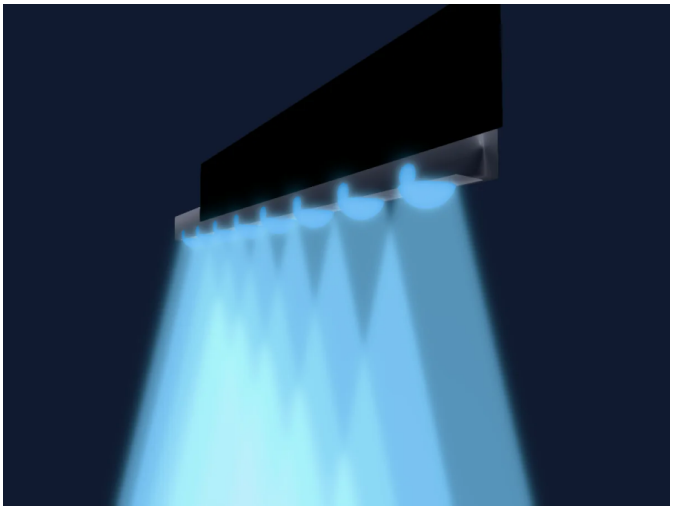

Manufacturer	**BeamZ**
Type	**LED bar**
DMX modes	**5**
DMX footprint	**3, 5, 6, 24, 48 channels**
Beam angle	**25°**
Heads / cells	**8**
Size (W × H × D)	**1050 × 70 × 65 mm**
GDTF fixture type	**4873DB47-6AAD-40D2-A576-A…**

Controls

RGB colour mixing · Dimmer · Pixel control

Safety-relevant functions

Built-in effect programmes

DMX modes

3 Channels	3 ch
5 Channels	5 ch
6 Channels	6 ch
24 Channels	24 ch
48Channels	48 ch

3 Channels

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

5 Channels

5 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Dimmer	0	
5	Shutter1Strobe	0	0–0 No Function 1–5 Sound control 6–10 No Function 11–255 Strobe with increasing speed

6 Channels

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Effect	0	

24 Channels

24 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Red	0	
5	Green	0	
6	Blue	0	
7	Red	0	
8	Green	0	
9	Blue	0	
10	Red	0	
11	Green	0	
12	Blue	0	
13	Red	0	
14	Green	0	
15	Blue	0	
16	Red	0	
17	Green	0	
18	Blue	0	

24 Channels (continued)

Ch	Function	Default	DMX values
19	Red	0	
20	Green	0	
21	Blue	0	
22	Red	0	
23	Green	0	
24	Blue	0	

48Channels

48 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter1Strobe	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Effect	0	
7	Dimmer	0	
8	Shutter1Strobe	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	Effect	0	
13	Dimmer	0	
14	Shutter1Strobe	0	
15	Red	0	
16	Green	0	
17	Blue	0	
18	Effect	0	
19	Dimmer	0	
20	Shutter1Strobe	0	
21	Red	0	
22	Green	0	
23	Blue	0	
24	Effect	0	
25	Dimmer	0	
26	Shutter1Strobe	0	
27	Red	0	
28	Green	0	
29	Blue	0	
30	Effect	0	
31	Dimmer	0	
32	Shutter1Strobe	0	
33	Red	0	
34	Green	0	
35	Blue	0	

48Channels (continued)

Ch	Function	Default	DMX values
36	Effect	0	
37	Dimmer	0	
38	Shutter1Strobe	0	
39	Red	0	
40	Green	0	
41	Blue	0	
42	Effect	0	
43	Dimmer	0	
44	Shutter1Strobe	0	
45	Red	0	
46	Green	0	
47	Blue	0	
48	Effect	0	