
BeamZ

LSB340 Multi Effect

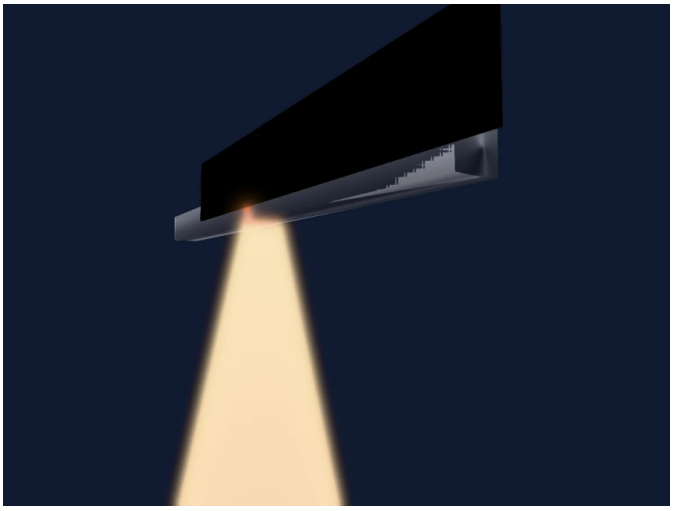

Manufacturer	**BeamZ**
Type	**LED bar**
DMX modes	**2**
DMX footprint	**7, 13 channels**
Beam angle	**25°**
Heads / cells	**2**
Size (W × H × D)	**1050 × 70 × 65 mm**
GDTF fixture type	**74DA9995-33DD-488E-9226-B0…**

Controls

Colour wheel · Strobe · Dimmer · Pixel control

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

7 Channels	7 ch
13 Channels	13 ch

7 Channels

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–9 No Function 10–255 Strobe
3	Color Effects1	0	0–9 No Function 10–19 Red 20–29 Green 30–39 Blue 40–49 Red+Green 50–59 Red+Blue 60–69 Green+Blue 70–255 Red+Green+Blue
4	Color Effects1	0	0–9 No Function 10–19 Red 20–29 Green 30–39 Blue 40–49 Red+Green 50–59 Red+Blue 60–69 Green+Blue 70–255 Red+Green+Blue
5	Strobe Mode Strobe	0	
6	L EDZone Mode	0	0–9 No Function 10–29 LED 1 30–49 LED 2 50–69 LED 3 70–89 LED 1 + LED 2 90–109 LED 1 + LED 3 110–129 LED 2 + LED 3 130–255 LED 1 + LED 2 + LED 3
7	Effect	0	0–9 No Function 10–39 Auto program 1 40–69 Auto program 2 70–99 Auto program 3 100–129 Auto program 4 130–159 Sound program 1 160–189 Sound program 2 190–219 Sound program 3 220–255 Sound program 4

13 Channels

13 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–9 No Function 10–255 Strobe
3	Red	0	
4	Green	0	
5	Blue	0	
6	Red	0	
7	Green	0	
8	Blue	0	
9	L EDZone Mode	0	0–9 No Function 10–255 Led strobe
10	Dimmer	0	
11	Dimmer	0	

13 Channels (continued)

Ch	Function	Default	DMX values
12	Dimmer	0	
13	Effect	0	0–9 No Function 10–39 Auto program 1 40–69 Auto program 2 70–99 Auto program 3 100–129 Auto program 4 130–159 Sound program 1 160–189 Sound program 2 190–219 Sound program 3 220–255 Sound program 4