
BeamZ

Starcolor 270z

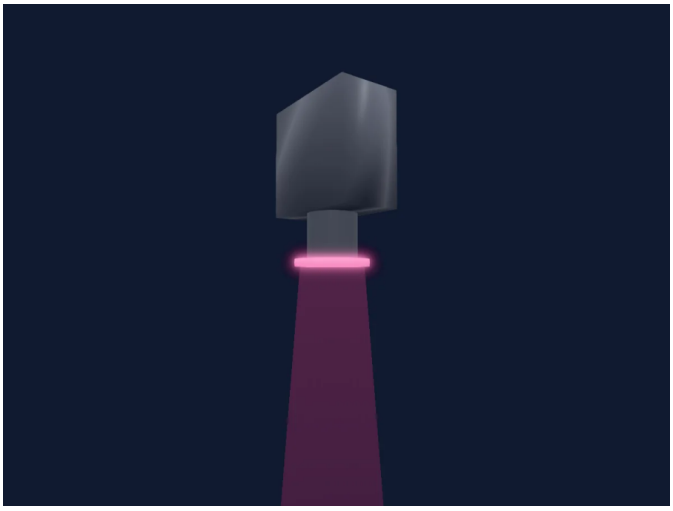

Manufacturer	**BeamZ**
Type	**PAR**
DMX modes	**1**
DMX footprint	**16 channels**
Beam angle	**2-23°**
Heads / cells	**2**
Size (W × H × D)	**320 × 300 × 170 mm**
GDTF fixture type	**C84379E7-B643-4BE1-8067-FA…**

Controls

Zoom · Colour wheel · Strobe · Dimmer · Pixel control

Safety-relevant functions

Fixture reset

DMX modes

16 channel mode 1 — 16 ch

16 channel mode 1

16 channels

Ch	Function	Default	DMX values
1	Zoom	128	
2	Dimmer	0	0–254 Closed 255–255 Open
3	Dimmer Fine	0	Fine byte of Dimmer
4	Shutter / Strobe	0	0–5 Strobe Open 6–10 Strobe Close 11–250 Strobe slow to fast 251–255 Strobe Open
5	Red	255	
6	Green	255	
7	Blue	255	
8	White	0	
9	Color Macro1	0	0–5 Colour Off 6–13 Red 14–21 Amber 22–29 Yellow Amber 30–37 Yellow 38–45 Green 46–53 Turquoise 54–61 Cyan 62–69 Blue 70–77 Lavender 78–85 Mauve 86–93 Magenta 94–101 Pink 102–109 Warm White 110–117 White 118–125 Cold White 126–127 No function 128–191 Colour jumping 192–255 Colour fading
10	Dimmer Curve	0	0–5 No function 6–63 Curve Linear 64–127 Curve Exponential 128–191 Curve Logarithmic 192–255 Curve S-curve
11	Function	0	0–5 No function 6–55 Dimmer response LED (hold 3 seconds) 56–105 Dimmer response Halogen (hold 3 seconds) 106–155 Fan High mode (hold 3 seconds) 156–205 Fan Auto mode (hold 3 seconds) 206–255 Reset all functions (hold 5 seconds)
12	Dimmer	0	0–254 Closed 255–255 Open
13	Shutter / Strobe	0	0–254 Strobe Open 255–255 Strobe Fast
14	Red	0	
15	Green	0	
16	Blue	0	