
Bombee

Favo

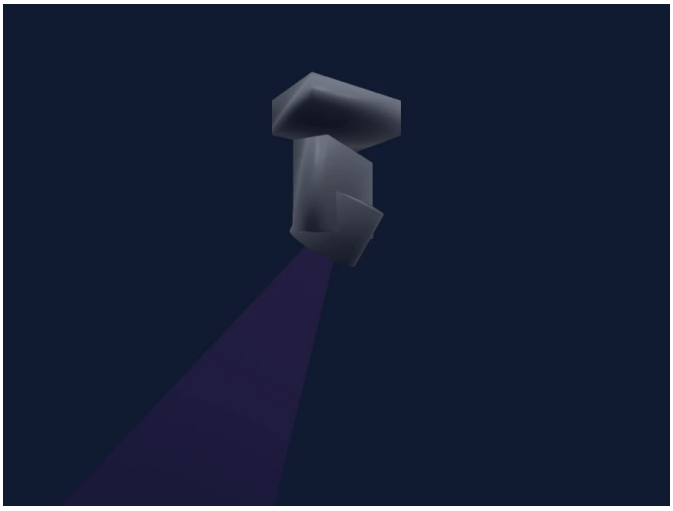

Manufacturer	**Bombee**
Type	**Moving head**
DMX modes	**1**
DMX footprint	**21 channels**
Beam angle	**2.5-60°**
Pan range	**540°**
Tilt range	**232°**
Size (W × H × D)	**212 × 165 × 212 mm**
GDTF fixture type	**E0A22B02-7D6C-2016-FCBD-36…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer · Pan and tilt

Safety-relevant functions

Fixture reset

DMX modes

21 Channel Mode — 21 ch

21 Channel Mode

21 channels

Ch	Function	Default	DMX values
1	Red	255	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
2	Red Fine	255	Fine byte of Red
3	Green	255	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
4	Green Fine	255	Fine byte of Green
5	Blue	255	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
6	Blue Fine	255	Fine byte of Blue
7	White	0	0–63 Min 64–127 25% 128–191 50% 192–254 75% 255–255 Max
8	White Fine	0	Fine byte of White
9	C TC	0	0–4 Disabled 5–254 CW 255–255 WW
10	Color Macro1	0	
11	Shutter / Strobe	0	0–131 Open 132–188 Strobe · Slow 189–246 Strobe · Medium 247–247 Strobe · Fast 248–251 Random Strobe 1 252–255 Random Strobe 2
12	Dimmer	0	0–63 Closed 64–127 25% 128–191 50% 192–254 75% 255–255 Open
13	Dimmer Fine	0	Fine byte of Dimmer
14	Pan	85	
15	Pan Fine	85	Fine byte of Pan
16	Tilt	128	
17	Tilt Fine	128	Fine byte of Tilt
18	Dimmer Curve	255	0–31 806Hz-Auto 32–63 806Hz-Fast 64–95 1562Hz-Auto 96–127 1562Hz-Fast 128–159 5000Hz-Auto 160–191 5000Hz-Fast 192–223 8333Hz-Auto 224–255 8333Hz-Fast
19	Fixture Global Reset	0	

21 Channel Mode (continued)

Ch	Function	Default	DMX values
20	Zoom	128	0–127 Wide 128–254 Normal 255–255 Narrow
21	Dummy	0	