
Bombee

Retro bar

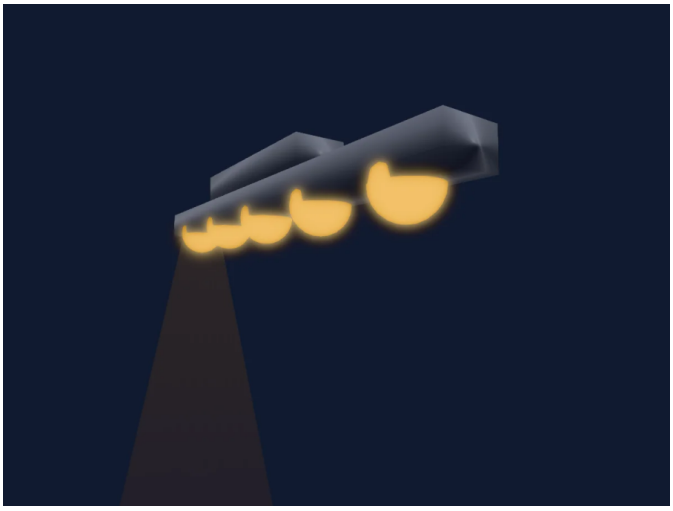

Manufacturer	**Bombee**
Type	**Effect light**
DMX modes	**5**
DMX footprint	**1, 3, 13, 14, 21 channels**
Beam angle	**25°**
Size (W × H × D)	**400 × 60 × 95 mm**
GDTF fixture type	**3006D848-CB14-4659-8B3D-FC…**

Controls

RGB colour mixing · Colour wheel · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

20ch Blinder	1 ch
20ch	3 ch
28ch	13 ch
14ch	14 ch
36ch	21 ch

20ch Blinder

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	

20ch

3 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	

28ch

13 channels

Ch	Function	Default	DMX values
1	Dimmer	255	0–254 Closed 255–255 Open
2	Dimmer	255	
3	Shutter1Strobe	0	0–5 No Function 6–37 Mode 1 38–60 Mode 2 61–83 Mode 3 84–106 Mode 4 107–128 Mode 5 129–255 Mode 6
4	Shutter / Strobe	0	
5	Intensity MSpeed	0	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Dimmer	255	0–254 Closed 255–255 Open
12	Shutter / Strobe	0	
13	Dimmer Curve	0	

14ch

14 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	Color Macro1Rate	0	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Shutter / Strobe	0	

14ch (continued)

Ch	Function	Default	DMX values
11	Effect	0	0–4 No Function 5–9 Macro 1 10–14 Macro 2 15–19 Macro 3 20–24 Macro 4 25–29 Macro 5 30–34 Macro 6 35–39 Macro 7 40–44 Macro 8 45–49 Macro 9 50–54 Macro 10 55–59 Macro 11 60–64 Macro 12 65–69 Macro 13 70–74 Macro 14 75–79 Macro 15 80–84 Macro 16 85–89 Macro 17 90–94 Macro 18 95–99 Macro 19 100–104 Macro 20 105–109 Macro 21 110–114 Macro 22 115–119 Macro 23 120–124 Macro 24 125–129 Macro 25 130–134 Macro 26 135–139 Macro 27 140–144 Macro 28 145–149 Macro 29 150–154 Macro 30 155–159 Macro 31 160–164 Macro 32 165–169 Macro 33 170–174 Macro 34 175–179 Macro 35 180–184 Macro 36 185–189 Macro 37 190–194 Macro 38 195–199 Macro 39 200–204 Macro 40 205–209 Macro 41 210–214 Macro 42 215–219 Macro 43 220–224 Macro 44 225–229 Macro 45 230–234 Macro 46 235–239 Macro 47 240–244 Macro 48 245–249 Macro 49 250–254 Macro 50 255–255 Macro 51
12	Effect Speed	255	
13	Intensity MSpeed	0	
14	Color Effects1	0	

36ch

21 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer	255	
3	Shutter1Strobe	0	0–5 No Function 6–37 Mode 1 38–60 Mode 2 61–83 Mode 3 84–106 Mode 4 107–128 Mode 5 129–255 Mode 6
4	Shutter / Strobe	255	
5	Effect	0	
6	Effect Speed	0	
7	Intensity MSpeed	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Dimmer	255	0–254 Closed 255–255 Open
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Shutter / Strobe	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Dimmer Curve	0	