
Cameo

F2 T

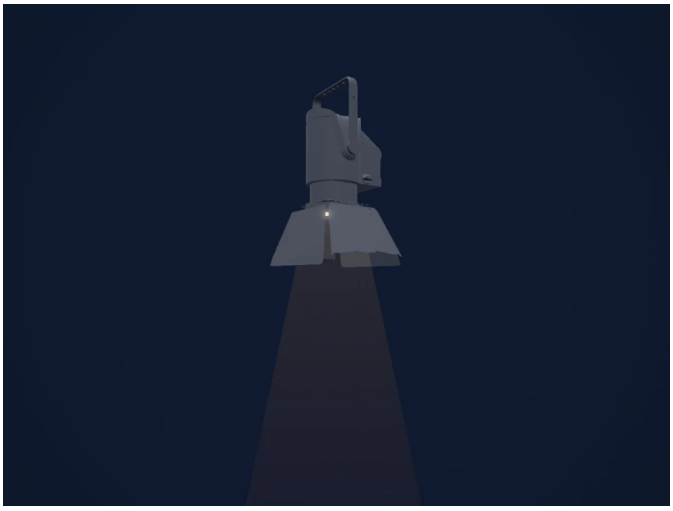

Manufacturer	**Cameo**
Type	**Profile spot**
DMX modes	**1**
DMX footprint	**5 channels**
Beam angle	**15-40°**
Size (W × H × D)	**422 × 689 × 351 mm**
GDTF fixture type	**06D15C26-E640-4583-BAD7-72…**

Controls

Strobe · Dimmer

DMX modes

Extended_vPTZ/Barndoors	5 ch

Extended_vPTZ/Barndoors

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–9 Open 10–10 Close 11–32 Pulse Random · Slow 0.5–4.8 Hz 33–33 Pulse Random · Fast 5 Hz 34–55 Ramp up Random · Slow 0.5–4.8 Hz 56–56 Ramp up Random · Fast 5 Hz 57–78 Ramp down Random · Slow 0.5–4.8 Hz 79–79 Ramp down Random · Fast 5 Hz 80–101 Random Strobe Effect · Slow 0.5–4.8 Hz 102–102 Random Strobe Effect · Fast 5 Hz 103–126 Strobe Break Effekt · 5s Short burst with break 1.5... 127–127 Strobe Break Effekt · 1s Short burst with break 5 Hz 128–128 Strobe Linear · Slow 1Hz 1 Hz 129–249 Strobe Linear · 1-20 Hz 250–250 Strobe Linear · Fast 20Hz 20 Hz 255–255 Open
4	Dimmer Curve	0	0–39 No function 40–79 Linear Dimmer Curve 80–139 Exponential Dimmer Curve 140–254 Logarithmic Dimmer Curve 255–255 S-Curve Dimmer Curve
5	Control1	0	0–54 no function 55–84 Dimmer Response LED (hold 5s) 85–194 Dimmer Response Halogen (hold 5s) 195–204 Fan Auto (hold 5s) 205–214 Fan Max (hold 5s) 215–219 Fan Silent (hold 5s) 220–224 LED Frequency 800Hz (hold 5s) 225–229 LED Frequency 1200Hz (hold 5s) 230–234 LED Frequency 2000Hz (hold 5s) 235–239 LED Frequency 3600Hz (hold 5s) 240–244 LED Frequency 12000Hz (hold 5s) 245–255 LED Frequency 25000Hz (hold 5s)

Fixture model: gdtf-cameo-f2-t-89261
Creator: HitLight
Modifications: Original HitLight 3D housing: scripted parametric geometry modelled by HitLight from public product photos and the manufactu...