
Chauvet Professional

COLORado 2 Solo VW

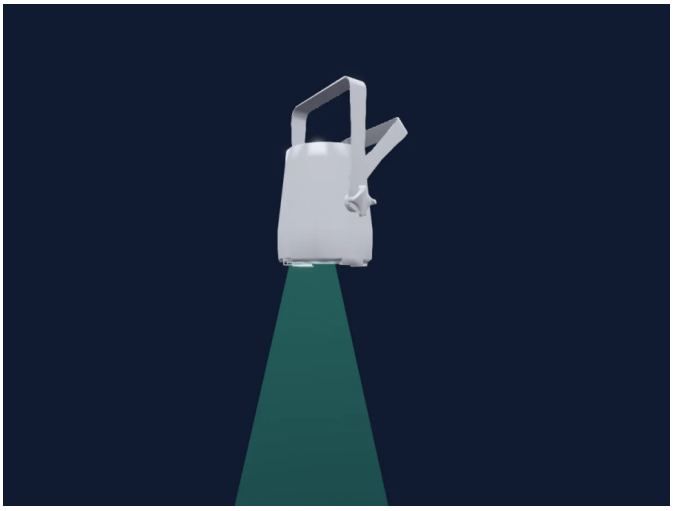

Manufacturer	**Chauvet Professional**
Type	**PAR**
DMX modes	**4**
DMX footprint	**1, 4, 7, 10 channels**
Beam angle	**4.8-48.4°**
Size (W × H × D)	**274 × 290 × 187 mm**
GDTF fixture type	**FD1A03A1-4C15-4AB0-B767-86…**

Controls

Zoom · Extra LED colours · Colour temperature · Dimmer

Safety-relevant functions

Fixture reset

DMX modes

1Ch	1 ch
4Ch	4 ch
7Ch	7 ch
10Ch Steady	10 ch

1Ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max

4Ch

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	Color Add WW	0	0–0 Min 1–254 Min > Max 255–255 Max
3	Color Add CW	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Zoom	127	0–0 Narrow 1–254 Narrow > Wide 255–255 Wide

7Ch

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Color Add WW	0	
4	Color Add WW Fine	0	Fine byte of Color Add WW
5	Color Add CW	0	
6	Color Add CW Fine	0	Fine byte of Color Add CW
7	Zoom	127	0–0 Narrow 1–254 Narrow > Wide 255–255 Wide

10Ch Steady

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Color Add WW	0	
4	Color Add WW Fine	0	Fine byte of Color Add WW
5	Color Add CW	0	
6	Color Add CW Fine	0	Fine byte of Color Add CW

10Ch Steady (continued)

Ch	Function	Default	DMX values
7	C TC	0	0–10 No Function - Custom 11–11 2800K - CTC 12–40 2801K - 3199K - CTC 41–41 3200K - CTC 42–70 3201K - 3599K - CTC 71–71 3600K - CTC 72–100 3601K - 3999K - CTC 101–101 4000K - CTC 102–130 4001K - 4499K - CTC 131–131 4500K - CTC 132–160 4501K - 4999K - CTC 161–161 5000K - CTC 162–190 5001K - 5499K - CTC 191–191 5500K - CTC 192–220 5501K - 5999K - CTC 221–221 6000K - CTC 222–250 6001K - 6499K - CTC 251–251 6500K - CTC 252–254 6501K - 6999K - CTC 255–255 7000K - CTC
8	Shutter1Strobe	0	0–9 Shutter Open - Shutter Open 10–99 Strobe S > F - Strobe 100–109 Shutter Open - Shutter Open 110–179 Lightning Effect S > F - Strobe 180–189 Shutter Open - Shutter Open 190–255 Strobe Random S > F - Strobe Random
9	Zoom	127	0–0 Narrow 1–254 Narrow > Wide 255–255 Wide
10	Control1	0	0–10 No Function - Custom 11–70 Reserved - Custom 71–80 600Hz Pulse Width Modulation - Custom 81–90 1200Hz Pulse Width Modulation - Custom 91–100 2000Hz Pulse Width Modulation - Custom 101–110 4000Hz Pulse Width Modulation - Custom 111–120 6000Hz Pulse Width Modulation - Custom 121–130 25KHz Pulse Width Modulation - Custom 131–140 Dimmer Reset - Reset 141–150 Dimmer Mode Off - Custom 151–160 Dimmer Mode 1 - Custom 161–170 Dimmer Mode 2 - Custom 171–180 Dimmer Mode 3 - Custom 181–190 Zoom Reset - Reset 191–200 All Reset - Reset 201–255 Reserved - Custom