
Martin

RUSH Strobe CWL

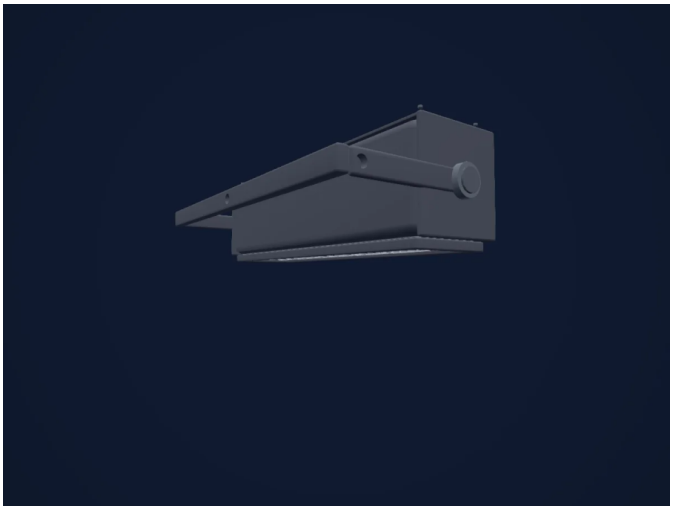

Manufacturer	**Martin**
Type	**Strobe**
DMX modes	**2**
DMX footprint	**1, 4 channels**
Beam angle	**87°**
Size (W × H × D)	**505 × 150 × 222 mm**
GDTF fixture type	**23DEDF5B-893D-5C38-8C9D-3…**

Controls

Effect control · Strobe · Dimmer

DMX modes

1-channel mode	1 ch
4-channel mode	4 ch

1-channel mode

1 channel

Ch	Function	Default	DMX values
1	Shutter / Strobe	0	0–5 Blackout 6–250 Flash rate, slow to fast 1–25 Hz 251–255 Continuous blinder effect (open)

4-channel mode

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–5 Blackout 6–255 Intensity, minimum to maximum
2	Flash duration (rectangular display approximatio…	255	
3	Shutter / Strobe	0	0–5 Closed between one-shot triggers (single event previe… 6–255 Flash rate, slow to fast 1–25 Hz
4	No Feature	0	0–5 No effect 6–50 Ramp up 51–100 Ramp down 101–150 Ramp up-down 151–200 Lightning 201–255 Random

Fixture model: gdtf-martin-rush-strobe-cwl-2611038304
Original HitLight primitive exterior reconstruction from private manufacturer references. Approximate planning geometry; fine fittings/source …
Creator: HitLight