
Nanlite

PAVOTUBE 6XR II

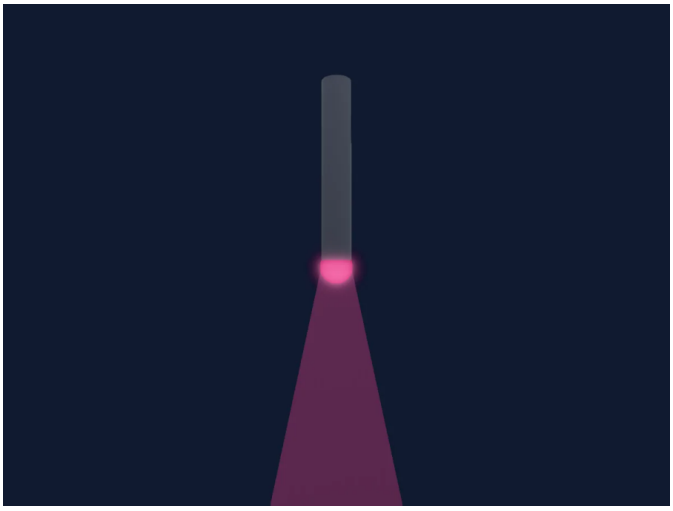

Manufacturer	**Nanlite**
Type	**PAR**
DMX modes	**2**
DMX footprint	**8, 11 channels**
Size (W × H × D)	**40 × 250 × 40 mm**
GDTF fixture type	**FB490AA4-0F0A-419B-8944-F9…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

CCT + RGBW 8BIT - REDUCED CHANNELS ON	8 ch
CCT + RGBW 8BIT - REDUCED CHANNELS OFF	11 ch

CCT + RGBW 8BIT - REDUCED CHANNELS ON

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	C TC	80	
3	Tint	133	0–9 Neutral 10–20 -150 Green 21–119 -149 to -1 Green 120–145 Neutral 146–244 +1 to +149 Green 245–255 +150 Green
4	Color XF	0	
5	Red	255	
6	Green	255	
7	Blue	255	
8	White	255	

CCT + RGBW 8BIT - REDUCED CHANNELS OFF

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	C TC	80	
3	Tint	133	0–9 Neutral 10–20 -150 Green 21–119 -149 to -1 Green 120–145 Neutral 146–244 +1 to +149 Green 245–255 +150 Green
4	Color XF	0	
5	Red	255	
6	Green	255	
7	Blue	255	
8	White	255	
9	Shutter / Strobe	0	0–3 Off 4–4 Random Fast 5–5 Random Medium 6–6 Random Slow 7–255 Variable Strobe (04 to 25Hz)
10	No Feature	0	
11	No Feature	0	