
Chauvet Professional

Strike Array 2

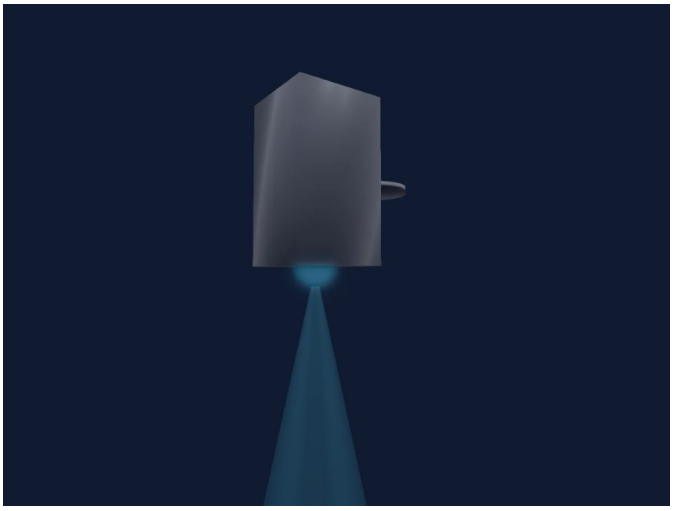

Manufacturer	**Chauvet Professional**
Type	**Blinder**
DMX modes	**1**
DMX footprint	**8 channels**
Size (W × H × D)	**250 × 450 × 250 mm**
GDTF fixture type	**0ABEE9A7-AEE0-4A5F-B65C-4F…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

8ch	8 ch

8ch

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Red Shift	0	0–0 Red shift on 1–255 Red shift off
4	Shutter / Strobe	0	0–10 No function 11–132 Strobe slow to fast 133–255 Random strobe slow to fast
5	Dimmer	255	0–254 Closed 255–255 Open
6	Reserved 6	0	
7	Effect	0	0–10 No function 11–40 Auto 1 slow to fast 41–80 Auto 2 slow to fast 81–120 Auto 3 slow to fast 121–160 Auto 4 slow to fast 161–200 Auto 5 slow to fast 201–240 Auto 6 slow to fast 241–255 No function
8	Control1	0	0–51 Current dimmer speed mode 52–101 Dimmer speed mode off (linear dimmer) 102–152 Dimmer speed mode 1 (fastest) 153–203 Dimmer speed mode 2 204–255 Dimmer speed mode 3 (slowest)