
China

Beam 280W Led Velvet

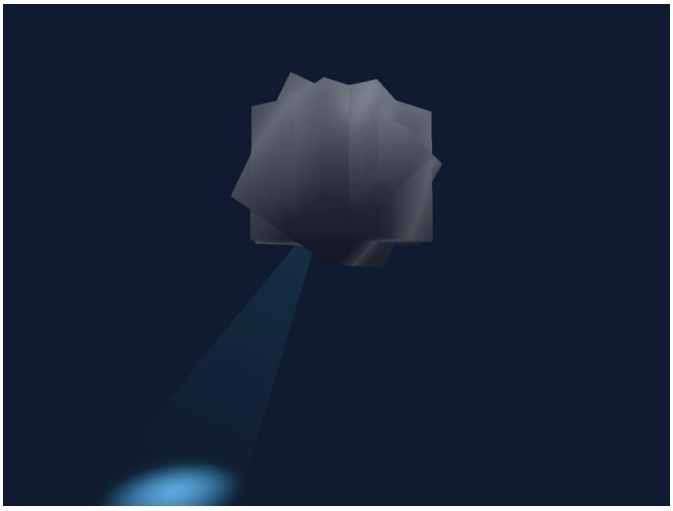

Manufacturer	**China**
Type	**Moving head**
DMX modes	**1**
DMX footprint	**16 channels**
Pan range	**1°**
Tilt range	**1°**
Size (W × H × D)	**1000 × 1000 × 1000 mm**
GDTF fixture type	**95435B50-6164-4F08-A52E-11…**

Controls

Focus · Frost · Prism · Prism rotation · Colour wheel · Strobe · Dimmer · Pan and tilt · Movement speed · Gobos · Gobo rotation

Safety-relevant functions

Lamp on and off · Fixture reset · Service functions · Strobe

DMX modes

16CH — 16 ch

16CH

16 channels

Ch	Function	Default	DMX values
1	Pan	0	
2	Tilt	0	
3	Pan Fine	0	Fine byte of Pan
4	Tilt Fine	0	Fine byte of Tilt
5	Position MSpeed	0	
6	Frost1	0	
7	Shutter / Strobe	0	0–0 Closed 1–50 Open 51–240 Strobe 241–255 Open
8	Dimmer	0	
9	Color Wheel	0	0–8 Open (wheel slot 1) 9–15 Red (wheel slot 2) 16–23 Yellow (wheel slot 3) 24–31 Blue (wheel slot 4) 32–39 Green (wheel slot 5) 40–47 Magenta (wheel slot 6) 48–55 CTB (wheel slot 7) 56–63 CTO (wheel slot 8) 64–71 Cyan (wheel slot 9) 72–79 Orange (wheel slot 10) 80–87 Lavender (wheel slot 11) 88–95 Light Green (wheel slot 12) 96–103 Open 1 (wheel slot 13) 104–111 Light Blue (wheel slot 14) 112–127 Pink (wheel slot 15) 128–191 Rainbow CW (wheel slot 16) 192–255 Rainbow CCW (wheel slot 17)
10	Color Calibration Mode	0	
11	Gobo	0	0–6 Open (wheel slot 1) 7–13 Gobo 1 (wheel slot 2) 14–20 Gobo 2 (wheel slot 3) 21–27 Gobo 3 (wheel slot 4) 28–34 Gobo 4 (wheel slot 5) 35–41 Gobo 5 (wheel slot 6) 42–48 Gobo 6 (wheel slot 7) 49–55 Gobo 7 (wheel slot 8) 56–62 Gobo 8 (wheel slot 9) 63–69 Gobo 9 (wheel slot 10) 70–76 Gobo 10 (wheel slot 11) 77–83 Gobo 11 (wheel slot 12) 84–90 Gobo 12 (wheel slot 13) 91–97 Gobo 13 (wheel slot 14) 98–104 Gobo 14 (wheel slot 15) 105–111 Gobo 15 (wheel slot 16) 112–118 Gobo 16 (wheel slot 17) 119–127 Gobo 17 (wheel slot 18) 128–191 Gobo CW (wheel slot 19) 192–255 Gobo CCW (wheel slot 20)
12	Gobo Rotation	0	
13	Focus	0	
14	Prism	0	0–31 No Prism (wheel slot 1) 32–255 16 Facet Prism (wheel slot 2)
15	Prism Rotation	0	0–127 Index 128–191 Rotate CW 192–255 Rotata CCW

16CH (continued)

Ch	Function	Default	DMX values
16	Control1	0	100–199 LAMP OFF 200–254 LAMP ON 255–255 RESET