
Chroma-Q

# Space Force Octo

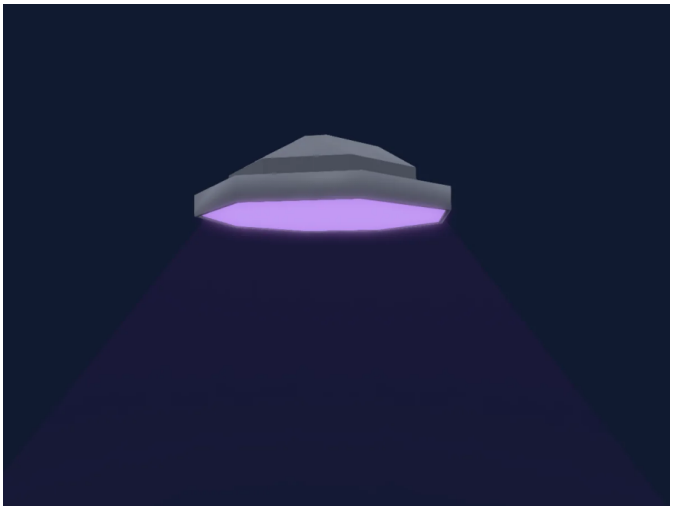

| | |
|---|---|
| Manufacturer | **Chroma-Q** |
| Type | **Profile spot** |
| DMX modes | **2** |
| DMX footprint | **2, 3 channels** |
| Beam angle | **80°** |
| Size (W × H × D) | **662 × 193 × 653 mm** |
| GDTF fixture type | **EB60805B-9066-4A01-AE37-FB…** |

## Controls

Colour temperature · Dimmer

## DMX modes

| | |
|---|---|
| INT-CCT | 2 ch |
| INT-CCT-EXTD | 3 ch |

## INT-CCT

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–0 Min<br>1–254 Min > Max<br>255–255 Max |
| 2 | C TC | 128 | 0–0 Min<br>1–254 Min > Max<br>255–255 Max |

## INT-CCT-EXTD

3 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–0 Min<br>1–254 Min > Max<br>255–255 Max |
| 2 | C TC | 128 | 0–0 Min<br>1–254 Min > Max<br>255–255 Max |
| 3 | Control1 | 0 | 0–2 No Function - Custom<br>3–10 Reserved - Custom<br>11–12 Fade Off - Custom<br>13–14 Fade On - Custom<br>15–70 Reserved - Custom<br>71–72 PWM 750 - Custom<br>73–74 PWM 1500 - Custom<br>75–76 PWM 3000 - Custom<br>77–78 PWM 6000 - Custom<br>79–80 PWM 12000 - Custom<br>81–82 PWM 24000 - Custom<br>83–84 PWM 48000 - Custom<br>85–86 PWM 96000 - Custom<br>87–140 Reserved - Custom<br>141–142 Enable RDM - Custom<br>143–144 Disable RDM - Custom<br>145–150 Reserved - Custom<br>151–152 DMX Lost Fixture Stay At The Last State - Custom<br>153–154 DMX Lost Fixture Goes Back - Custom<br>155–156 Reserved - Custom<br>157–158 DMX Lost Fixture To Selected Look - Custom<br>159–243 Reserved - Custom<br>244–245 Save As User Default - Custom<br>246–247 Restore User Default - Custom<br>248–249 Restore Default Settings - Custom<br>250–255 No Function - Custom |