
CKC Lighting

Pendant 300

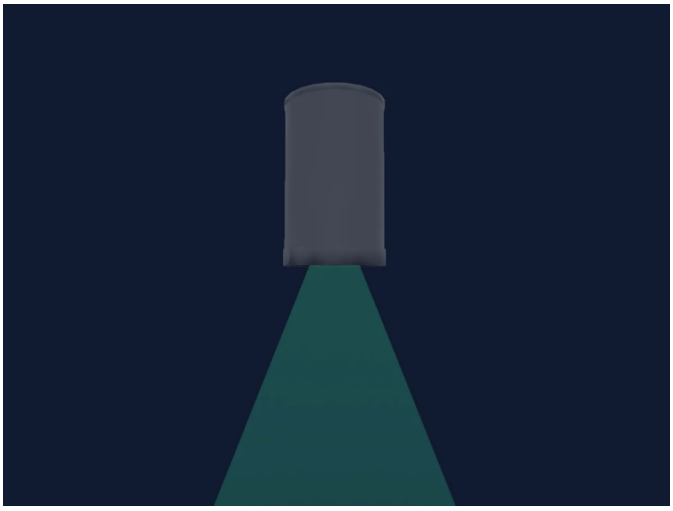

Manufacturer	**CKC Lighting**
Type	**PAR**
DMX modes	**3**
DMX footprint	**1, 2, 4 channels**
Beam angle	**45°**
Size (W × H × D)	**90 × 90 × 190 mm**
GDTF fixture type	**7E86739F-FF6B-4FD7-AE6C-75…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

1CH	1 ch
2CH	2 ch
4CH	4 ch

1CH

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 0 percent 63–126 25 percent 127–190 50 percent 191–254 75 percent 255–255 100 percent

2CH

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 0 percent 63–126 25 percent 127–190 50 percent 191–254 75 percent 255–255 100 percent
2	Shutter / Strobe	50	0–31 Shutter Closed 32–63 No Function (Shutter Open) 64–95 Strobe Effect Slow to Fast 96–127 No Function (Shutter Open) 128–159 Pulse-Effect in Sequences 160–191 No Function (Shutter Open) 192–223 Random Strobe Effect Slow to Fast 224–255 No Function (Shutter Open)

4CH

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–62 0 percent 63–126 25 percent 127–190 50 percent 191–254 75 percent 255–255 100 percent
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	50	0–31 Shutter Closed 32–63 No Function (Shutter Open) 64–95 Strobe Effect Slow to Fast 96–127 No Function (Shutter Open) 128–159 Pulse-Effect in Sequences 160–191 No Function (Shutter Open) 192–223 Random Strobe Effect Slow to Fast 224–255 No Function (Shutter Open)
4	Function	0	20–20 Idle 21–40 Standard 41–60 Stage 61–80 TV 81–100 Architectural 101–120 Theatre 121–130 Dimmer Curve Linear 131–140 Dimmer Curve Square 141–150 Dimmer Curve Inverse Square 151–160 Dimmer Curve S-Curve 161–255 Idle