
Coemar Lighting

ReLite Kit Mk2

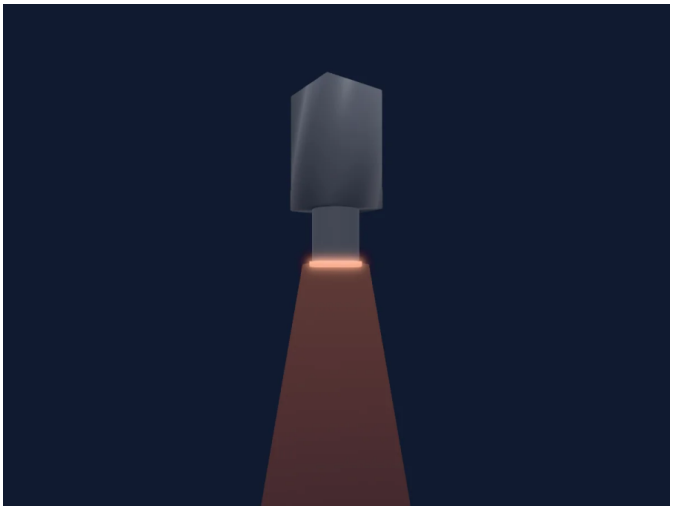

Manufacturer	**Coemar Lighting**
Type	**PAR**
DMX modes	**3**
DMX footprint	**1, 2, 6 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 450 × 250 mm**
GDTF fixture type	**660DD6AE-52C0-43DF-8511-3B…**

Controls

Colour temperature · Dimmer

Safety-relevant functions

Service functions

DMX modes

1ch	1 ch
2ch	2 ch
6ch	6 ch

1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	C TC	0	0–10 3200 11–16 2700K 17–22 2800K 23–28 2900K 29–34 3000K 35–40 3100K 41–46 3200K 47–52 3300K 53–58 3400K 59–64 3500K 65–70 3600K 71–76 3700K 77–82 3800K 83–88 3900K 89–94 4000K 95–100 4100K 101–106 4200K 107–112 4300K 113–118 4400K 119–124 4500K 125–130 4600K 131–136 4700K 137–142 4800K 143–148 4900K 149–154 5000K 155–160 5100K 161–166 5200K 167–172 5300K 173–178 5400K 179–184 5500K 185–190 5600K 191–196 5700K 197–202 5800K 203–208 5900K 209–214 6000K 215–220 6100K 221–226 6200K 227–232 6300K 233–238 6400K 239–244 6500K 245–255 5600K

6ch

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

6ch (continued)

Ch	Function	Default	DMX values
3	C TC	0	0–10 3200 11–16 2700K 17–22 2800K 23–28 2900K 29–34 3000K 35–40 3100K 41–46 3200K 47–52 3300K 53–58 3400K 59–64 3500K 65–70 3600K 71–76 3700K 77–82 3800K 83–88 3900K 89–94 4000K 95–100 4100K 101–106 4200K 107–112 4300K 113–118 4400K 119–124 4500K 125–130 4600K 131–136 4700K 137–142 4800K 143–148 4900K 149–154 5000K 155–160 5100K 161–166 5200K 167–172 5300K 173–178 5400K 179–184 5500K 185–190 5600K 191–196 5700K 197–202 5800K 203–208 5900K 209–214 6000K 215–220 6100K 221–226 6200K 227–232 6300K 233–238 6400K 239–244 6500K 245–255 5600K
4	C TC Fine	0	Fine byte of C TC
5	Shutter1Strobe	0	0–9 Open (No Effect) 10–57 Strobe 58–59 Open (No Effect) 60–108 Ramp Down Pulse 109–110 Open (No Effect) 111–159 Ramp Up Pulse 160–161 Open (No Effect) 162–207 Random Strobe 208–209 Open (No Effect) 210–255 Random Strobe
6	Control1	11	0–9 Park 10–84 No Effect 85–96 LOW Mode (Fan Speed) 97–108 STUDIO Mode (Fan Speed) 109–120 AUTO Mode (Fan Speed) 121–133 Min > Max (Fan Speed) 134–185 Turn Display Off 186–199 Turn Display On 200–255 No Effect