
Prolights

EclDisplayDATVWProfile10-20

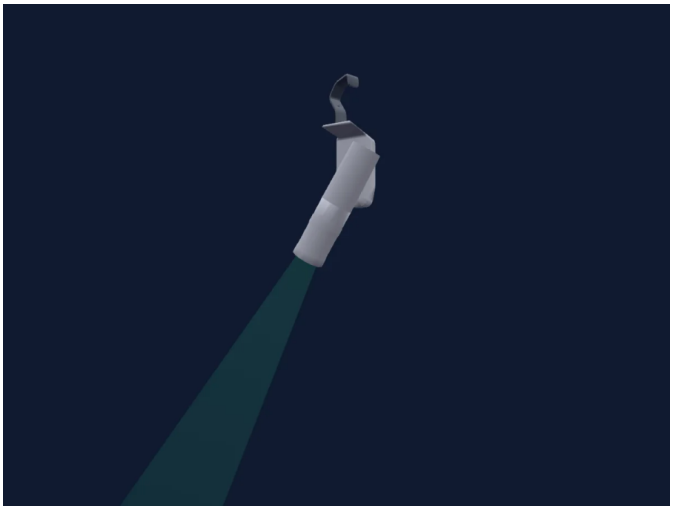

Manufacturer	**Prolights**
Type	**Profile spot**
DMX modes	**4**
DMX footprint	**1, 2, 4, 10 channels**
Beam angle	**10-20°**
Pan range	**360°**
Tilt range	**280°**
Size (W × H × D)	**82 × 304 × 82 mm**
GDTF fixture type	**D5F18C34-0836-451D-A3A0-A8…**

Controls

Extra LED colours · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

Uno_1ch	1 ch
Basic_2ch	2 ch
Standard_4ch	4 ch
Extended_4ch	10 ch

Uno_1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

Basic_2ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	C TC	0	0–254 2700K 255–255 5600K

Standard_4ch

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	255	0–1 Open 2–62 Strobe 63–64 Open 65–125 PulseInStrobe 126–127 Closed 128–188 PulseOutStrobe 189–190 Open 191–251 RandomStrobe 252–255 Open
4	C TC	0	0–254 2700K 255–255 5600K

Extended_4ch

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	255	0–1 Open 2–62 Strobe 63–64 Open 65–125 PulseInStrobe 126–127 Closed 128–188 PulseOutStrobe 189–190 Open 191–251 RandomStrobe 252–255 Open
4	C TC	0	0–254 2700K 255–255 5600K
5	Color XFade	255	0–254 CTC 255–255 ColorMix
6	Color Add WW	255	
7	Color Add WW Fine	255	Fine byte of Color Add WW
8	Color Add CW	255	
9	Color Add CW Fine	255	Fine byte of Color Add CW

Extended_4ch (continued)

Ch	Function	Default	DMX values
10	Control1	0	0–1 NoFunction 2–3 Linear 4–5 S-Curve 6–7 Square Law 8–9 Inverse Square Law 10–11 Auto 12–13 Fast 14–15 Medium 16–17 Slow 18–19 600 Hz 20–21 1200 Hz 22–23 2000 Hz 24–25 4000 Hz 26–27 6000 Hz 28–29 25 kHz 30–31 Master DMX 32–33 Master NO DMX 34–35 SLAVE 36–37 Hold 38–39 BlackOut 40–41 StandAlone 42–251 Reserved 252–253 FactoryDefault 254–255 Reserved 1