
Eurolite

LED IP PAR-64 COB 3000K Zoom

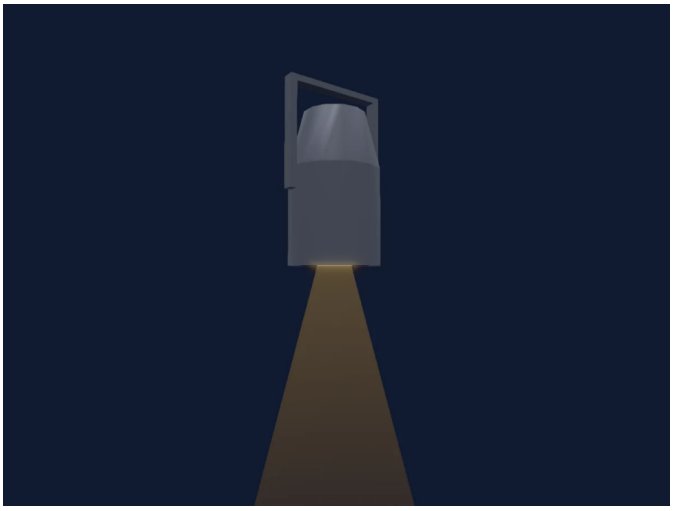

Manufacturer	**Eurolite**
Type	**PAR**
DMX modes	**4**
DMX footprint	**1, 2, 3, 4 channels**
Beam angle	**7-53°**
Size (W × H × D)	**39 × 345 × 343 mm**
GDTF fixture type	**7BA8FBBF-AA77-4B0F-815C-64…**

Controls

Zoom · Strobe · Dimmer

DMX modes

1ch	1 ch
2ch	2 ch
3ch	3 ch
4ch	4 ch

1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	

2ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Zoom	128	0–254 Wide 255–255 Narrow

3ch

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–15 LED on 16–30 LED off 31–89 Shutter1Strobe · 1Hz 0.1–9.83 Hz 90–90 Shutter1Strobe · 20Hz 10 Hz 91–105 LED on 106–164 Shutter1Strobe 1 · Min 0.1–9.83 Hz 165–165 Shutter1Strobe 1 · Max 10 Hz 166–180 LED on 181–239 Strobe random slow 240–240 Strobe random fast 241–255 LED on
3	Zoom	128	0–254 Wide 255–255 Narrow

4ch

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–15 LED on 16–30 LED off 31–89 Shutter1Strobe · 1Hz 0.1–9.83 Hz 90–90 Shutter1Strobe · 20Hz 10 Hz 91–105 LED on 106–164 Shutter1Strobe 1 · Min 0.1–9.83 Hz 165–165 Shutter1Strobe 1 · Max 10 Hz 166–180 LED on 181–239 Strobe random slow 240–240 Strobe random fast 241–255 LED on
3	Zoom	128	0–254 Wide 255–255 Narrow
4	Dimmer Curve	16	