
flashPRO

LED Pixel 30W RGBW 4in1 -IR remote P9800025

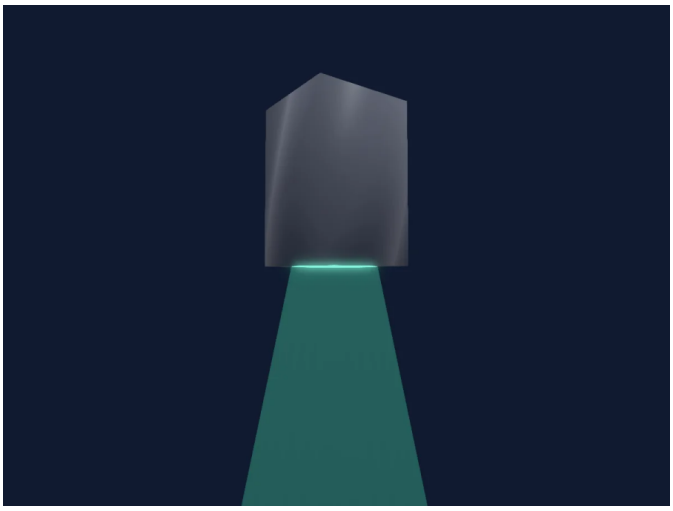

Manufacturer	**flashPRO**
Type	**PAR**
DMX modes	**9**
DMX footprint	**3, 4, 6, 7, 8 channels**
Beam angle	**25°**
Size (W × H × D)	**120 × 190 × 120 mm**
GDTF fixture type	**8C3ED19B-FEF8-4256-A0A0-C4…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

RGB	3 ch
RGBW	4 ch
Classic-6	6 ch
Pro-6	6 ch
RGB 16bit	6 ch
Pro-7	7 ch
Classic-8	8 ch
Flash A-DMX	8 ch
RGBW 16bit	8 ch

RGB

3 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	

RGBW

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

Classic-6

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Min strobe 255–255 Max strobe
3	Red	255	
4	Green	255	
5	Blue	255	
6	White	0	

Pro-6

6 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Dimmer	0	0–254 Closed 255–255 Open
6	Shutter / Strobe	0	0–10 Open 11–254 Min strobe 255–255 Max strobe

RGB 16bit

6 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Red Fine	255	Fine byte of Red
3	Green	255	
4	Green Fine	255	Fine byte of Green
5	Blue	255	
6	Blue Fine	255	Fine byte of Blue

Pro-7

7 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Dimmer	0	0–254 Closed 255–255 Open
6	Dimmer Fine	0	Fine byte of Dimmer
7	Shutter / Strobe	0	0–10 Open 11–254 Min strobe 255–255 Max strobe

Classic-8

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–254 Min strobe 255–255 Max strobe
3	Red	255	
4	Green	255	
5	Blue	255	
6	White	0	
7	Color Macro1	0	
8	Color Macro1Rate	0	0–0 Open 1–254 Fast pulse 255–255 Slow pulse

Flash A-DMX

8 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Dimmer	0	0–254 Closed 255–255 Open
6	Reserved 6	0	
7	Shutter / Strobe	0	0–10 Open 11–254 Min strobe 255–255 Max strobe
8	Color Macro1	0	

RGBW 16bit

8 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Red Fine	255	Fine byte of Red
3	Green	255	

RGBW 16bit (continued)

Ch	Function	Default	DMX values
4	Green Fine	255	Fine byte of Green
5	Blue	255	
6	Blue Fine	255	Fine byte of Blue
7	White	0	
8	White Fine	0	Fine byte of White