
Prolights

EclParIPMUV

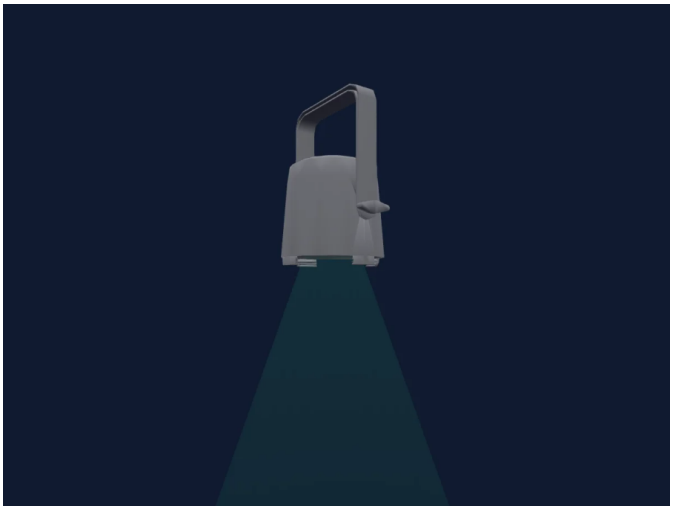

Manufacturer	**Prolights**
Type	**Spot**
DMX modes	**3**
DMX footprint	**1, 2, 4 channels**
Beam angle	**40°**
Size (W × H × D)	**259 × 248 × 65 mm**
GDTF fixture type	**A59E9D70-C409-4F13-81D2-73…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

UNO	1 ch
DUO	2 ch
Standard	4 ch

UNO

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

DUO

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

Standard

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	255	0–1 Open 2–62 Strobe 63–64 Open 65–125 PulseInStrobe 126–127 Closed 128–188 PulseOutStrobe 189–190 Open 191–251 RandomStrobe 252–255 Open
4	Control1	0	