
Prolights

EclParTU_24

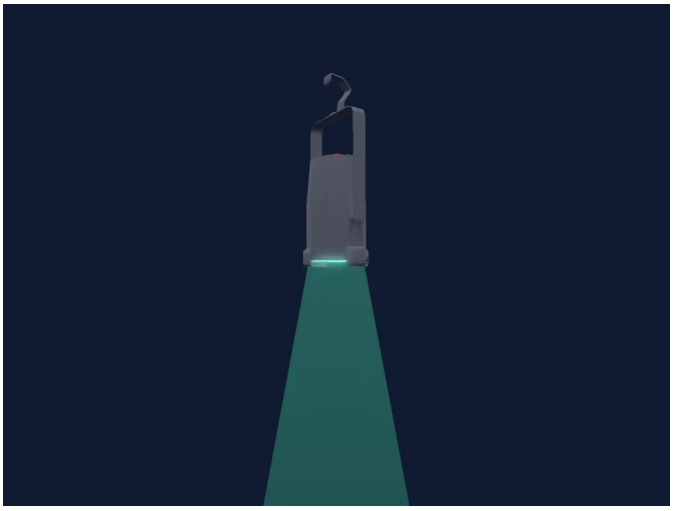

Manufacturer	**Prolights**
Type	**PAR**
DMX modes	**4**
DMX footprint	**1, 2, 3, 6 channels**
Beam angle	**24.2°**
Size (W × H × D)	**218 × 317 × 208 mm**
GDTF fixture type	**CA88BAEC-7EBC-4D8D-914D-B…**

Controls

Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

1ch	1 ch
2ch	2 ch
3ch	3 ch
6ch	6 ch

1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	10	0–10 Open 11–254 Strobe · Slow 1–29.9 Hz 255–255 Strobe · Fast 30 Hz

3ch

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	10	0–10 Open 11–254 Strobe · Slow 1–29.9 Hz 255–255 Strobe · Fast 30 Hz

6ch

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	10	0–10 Open 11–254 Strobe · Slow 1–29.9 Hz 255–255 Strobe · Fast 30 Hz
4	Effect	0	0–10 NoFeature 11–85 Effect1 86–170 Effect2 171–255 Effect3
5	Effect Speed	0	0–126 Slow 127–254 Mid 255–255 Fast
6	Dimmer Mode	0	0–51 AsFromMenu 52–101 Off 102–152 Fast 153–203 Mid 204–255 Slow