
Prolights

EclProfileHD2TU_26

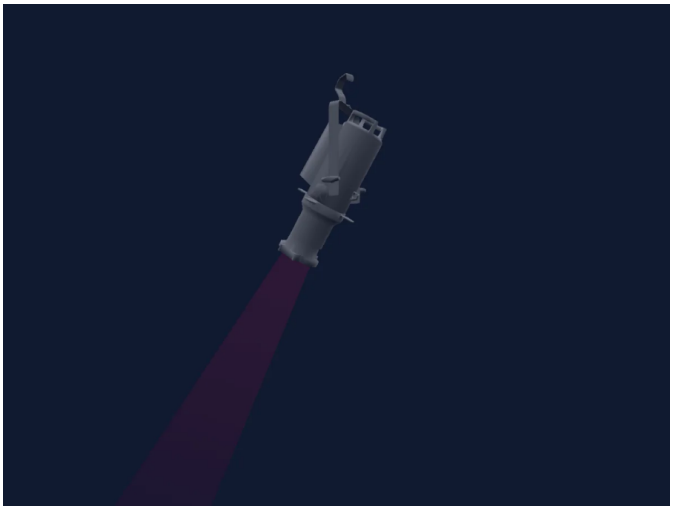

Manufacturer	**Prolights**
Type	**Profile spot**
DMX modes	**3**
DMX footprint	**1, 2, 5 channels**
Beam angle	**13.9°**
Pan range	**360°**
Tilt range	**360°**
Size (W × H × D)	**277 × 523 × 277 mm**
GDTF fixture type	**D74EDD28-E160-4493-85E1-77…**

Controls

Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

1ch	1 ch
2ch	2 ch
5ch	5 ch

1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–11 Slow Strobe 12–254 Strobe 255–255 Fast Strobe

5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–10 Open 11–11 Slow Strobe 12–254 Strobe 255–255 Fast Strobe
3	Effect	0	0–10 NoFeature 11–70 AutoPRG_1 71–130 AutoPRG_2 131–255 AutoPRG_1
4	Effect Speed	0	0–0 Slow Rate 1–254 Program Rate 255–255 Fast
5	Dimmer Mode	0	0–51 AsFromMenu 52–101 OFF 102–152 Fast 153–203 Middle 204–255 Slow