
Prolights

Equinox Fusion 260ZR

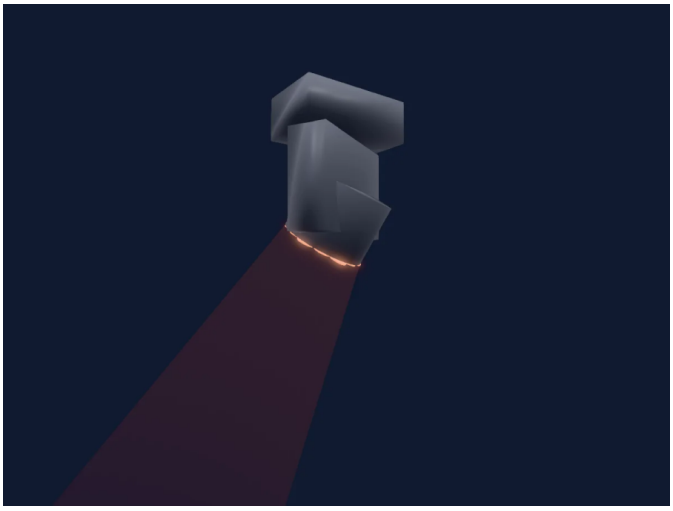

Manufacturer	**Prolights**
Type	**Moving head**
DMX modes	**1**
DMX footprint	**25 channels**
Beam angle	**6-50°**
Pan range	**540°**
Tilt range	**230°**
Heads / cells	**3**
Size (W × H × D)	**221 × 162 × 221 mm**
GDTF fixture type	**EEFC294B-850C-40E8-9C73-9B…**

Controls

Zoom · Dimmer · Pixel control · Pan and tilt

Safety-relevant functions

Fixture reset

DMX modes

25 Channel Mode — 25 ch

25 Channel Mode

25 channels

Ch	Function	Default	DMX values
1	Pan	128	
2	Pan Fine	0	Fine byte of Pan
3	Tilt	128	
4	Tilt Fine	0	Fine byte of Tilt
5	Pan Tilt Mode	0	
6	Zoom	0	
7	Dimmer	0	
8	Strobe Frequency	16	0–15 StrobeFrequency off 16–253 StrobeFrequency (low-high) 254–255 StrobeFrequency off 1
9	Red	0	
10	Green	0	
11	Blue	0	
12	White	0	
13	Red	0	
14	Green	0	
15	Blue	0	
16	White	0	
17	Red	0	
18	Green	0	
19	Blue	0	
20	White	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Fixture Global Reset	128	0–127 NoFeature 1 128–255 FixtureGlobalReset 1