
HarmanyLX

Fresnel 300W LED CW/WW 2in1

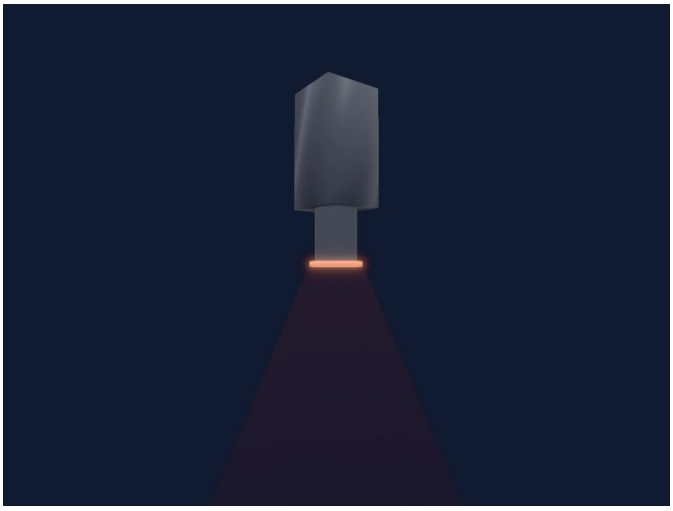

Manufacturer	**HarmanyLX**
Type	**Spot**
DMX modes	**2**
DMX footprint	**3, 7 channels**
Beam angle	**49°**
Size (W × H × D)	**228 × 448 × 228 mm**
GDTF fixture type	**FFD057A8-9F53-47D1-9436-53…**

Controls

Focus · Zoom · Extra LED colours · Dimmer

DMX modes

3 CH	3 ch
7 CH	7 ch

3 CH

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Color Add WW	0	0–254 Close 255–255 Open
3	Zoom	0	0–254 Small 255–255 Large

7 CH

7 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Strobe Mode Strobe	0	0–254 Close 255–255 Open
3	Function	0	0–5 Empty 6–40 Jump 41–80 Gradual Change 81–120 Pulse Change 121–160 Jump 161–200 Gradual Change 201–240 Pulse Change 241–255 Voice Control
4	Function Speed	0	0–254 Slow 255–255 Fast
5	Color Add WW	0	
6	Color Add CW	0	
7	Focus	0	0–254 Small 255–255 Large