
Prolights

# MiniEclWDDY_19

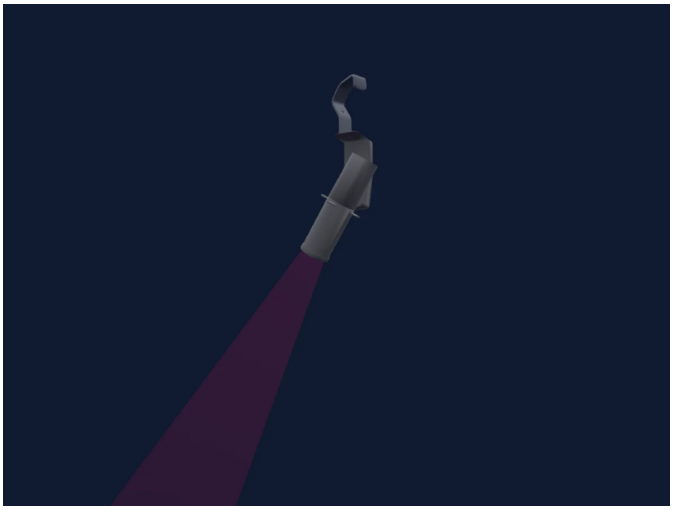

| | |
|---|---|
| Manufacturer | **Prolights** |
| Type | **Profile spot** |
| DMX modes | **3** |
| DMX footprint | **1, 2, 5 channels** |
| Beam angle | **18.1°** |
| Pan range | **360°** |
| Tilt range | **270°** |
| Size (W × H × D) | **103 × 226 × 103 mm** |
| GDTF fixture type | **AB297EA9-DB6A-43A8-9BFF-20…** |

## Controls

Effect speed · Strobe · Dimmer

## Safety-relevant functions

Strobe · Built-in effect programmes

## DMX modes

| | |
|---|---|
| 1ch | 1 ch |
| 2ch | 2 ch |
| 5ch | 5 ch |

## 1ch

1 channel

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |

## 2ch

2 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Shutter / Strobe | 10 | 10–10 Open<br>11–254 Slow Strobe<br>255–255 Fast Strobe |

## 5ch

5 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Shutter / Strobe | 10 | 10–10 Open<br>11–254 Slow Strobe<br>255–255 Fast Strobe |
| 3 | Effect | 10 | 0–10 NoFeature<br>11–70 Effect 1<br>71–130 Effect 2<br>131–190 Effecr 3<br>191–255 Effect 4 |
| 4 | Effect Speed | 0 | 0–254 Slow rate<br>255–255 Fast rate |
| 5 | Dimmer Mode | 0 | 0–51 AsFrom Menu<br>52–101 Off<br>102–152 Fast<br>153–203 Mid<br>204–255 Slow |